

Response Fabrics™

Fabrics For The World's Best Offices

WORLD OF FABRICS

CUSTOMIZED FABRIC CATALOGUE

Delhi | Pune | Mumbai | Kolkata | Hyderabad | Bangalore | Chennai



Response fabrics pvt ltd manufactures fabrics in India incorporates in the year 2004. The company is an ISO 9001 certified. We create world-class design fabrics suited for corporate offices, commercial and the hospitality sector. We also manufacture fabrics for office workstations, modular furniture, wall panelling, loose furniture, sofas, multiplex/ auditorium wall panels, chairs and recliners. These fabrics are produced in our state with the art manufacturing facilities.

Recently, we have started manufacturing Leatherite, commonly known as Rexine. Response fabrics offer you all types of qualities in artificial leather. We offer you a wide range of Leatherite that can be used in offices, sofas, chairs, cinema halls, auditorium, automobiles, jackets and many more.

Our product portfolio includes high-quality Crepes, Poly recycled cotton, Dobby, Mesh, polyester Leatherite, Jacquard, Jute, Knitted, Printed and PP spun bond non-woven fabrics etc.

*Fabrics for
the world's
best offices!*

VISION

Our vision is to involve ourselves responsibly, efficiently and profitably in the global textile industry. More importantly, to attain customer satisfaction by providing the best of our products by emphasising on the best quality, innovation, possessing highly empowered and skilled employees keeping in mind to create an eco-friendly atmosphere.

MISSION

Response fabrics Pvt. Ltd is to be a pioneer in this ever-changing textile industry. The purpose is to serve our customers with immense dedication and offer them services above their expectations. To achieve 100% customer satisfaction through timely deliveries with zero defects.

If you cannot find what you are looking for in our standard catalogue, then we can offer custom made services in various designs/colour and will be at your disposal to discuss your special requirement. We maintain a substantial stock of about 700 SKU'S (Stock keeping unit). If for some reason, our products are out of stock, we commit to deliver the standard stock items within a short period.

Our USP is that we accept orders for required quantity as well.



Click here to
chat with us

We are Manufacturer of:

Antimicrobial Fabrics

Workstation Fabrics

Artificial Leather

Auditorium Fabric

Acoustic Fabrics

Office Chair

Hospitality Fabric

Upholstery Fabric



Anti-static



Stain repellent



Inherent fire
retardant
(IFR)



Biodegradable



Click here to
chat with us

CORPORATE/ COMMERCIAL FABRICS

ALPINE ▶

AUTUMN ▶

BLOSSOM ▶

BREEZE ▶

CARA ▶

ECLIPSE ▶

ELITE ▶

ESTER ▶

FESTIVAL ▶

FOCUS ▶

GRAVITY ▶

HEXA ▶

JUTE ▶

MANTHAN ▶

MARS ▶



CORPORATE/ COMMERCIAL FABRICS

MARS 2 ▶

MESH ▶

MESH 2 ▶

NATURE ▶

NEON
UNITY ▶

NEPTUNE ▶

OLIVER ▶

ORBIT ▶

OXY
COMFORT ▶

OXYGEN ▶







RAINBOW ▶

SOUL ▶

VELVET ▶



VIBRANT ▶



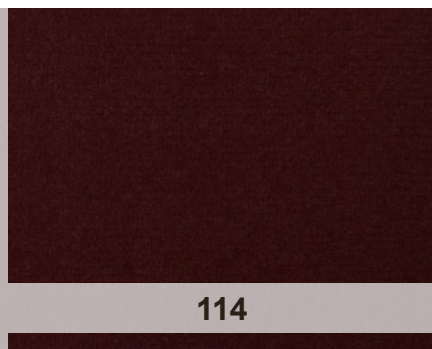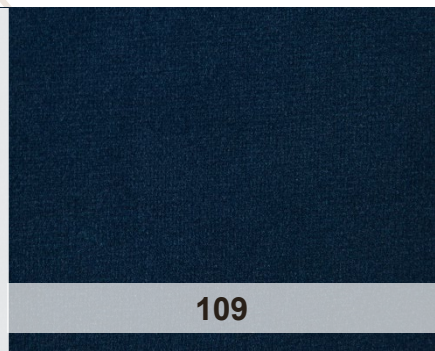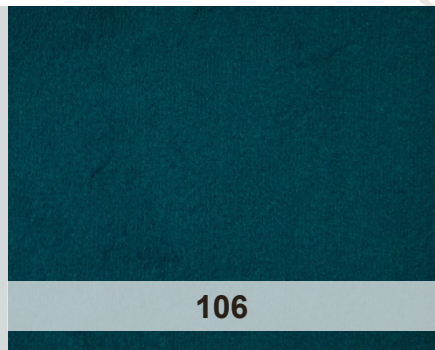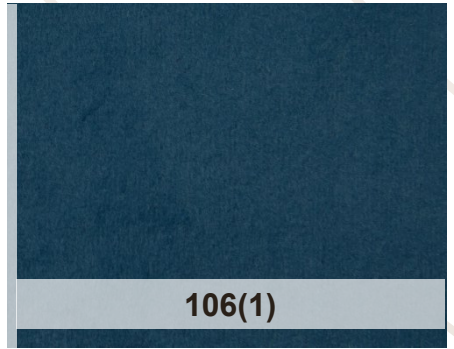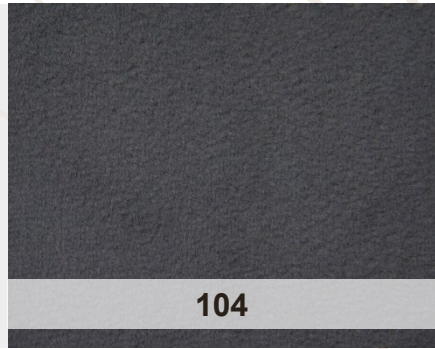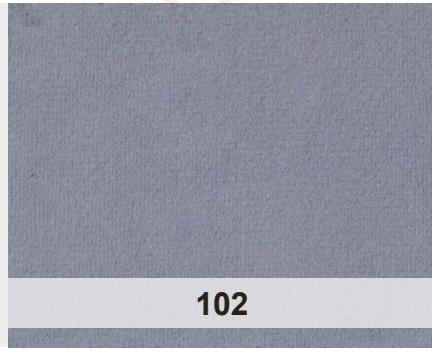

Click here to chat with us



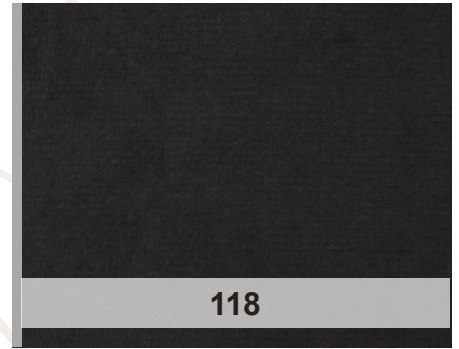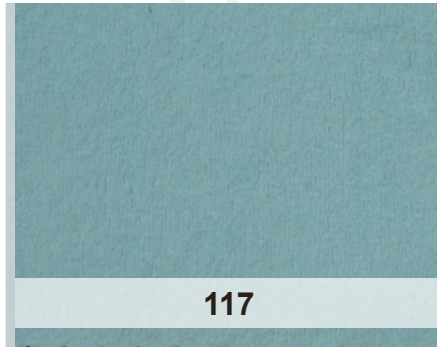

Click here to chat with us





SPECIFICATION REQUIRED



Click here to chat with us





Click here to chat with us





Click here to chat with us





SPECIFICATION REQUIRED



Click here to chat with us





Click here to chat with us





Click here to chat with us



BLOSSOM



Composition	100% Polyester
Weight	410 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion Resistance	In Excess of 50,000 Cycles Martindale Abrasion tester at 12KPA Pressure.
Flammability	BS EN 1021-1 : 1994(Cigarette) BS 7176 : 1995 Low Hazard Flammability Performance is Dependent on the Combination of Material Used.
Light Fastness	IS 2454:1985 (Reaffirmed 2010)



Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com



BREEZE 01



BREEZE 02



BREEZE 03



BREEZE 04



BREEZE 05



BREEZE 06



BREEZE 07



BREEZE 08



BREEZE 09



BREEZE 10



BREEZE 11



BREEZE 12



BREEZE 13



BREEZE 14



Click here to chat with us






SPECIFICATION REQUIRED



Click here to chat with us



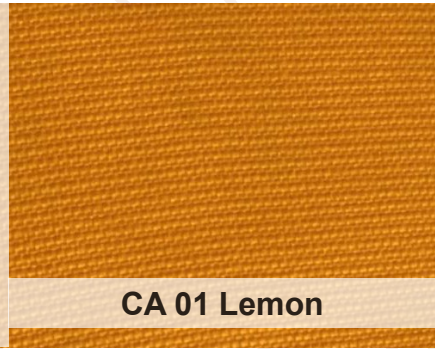

CA 01 Lemon



CA 02 Energy



CA 03 Attenzione



CA 04 Sea-Ridge




CA 05 Lilac




Click here to chat with us



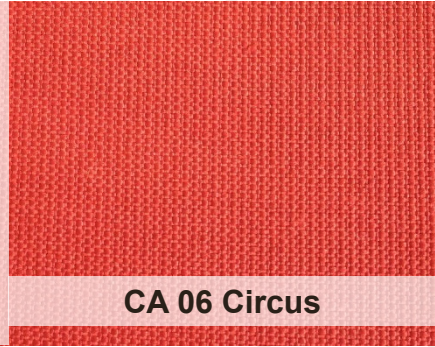

CA 06 Circus

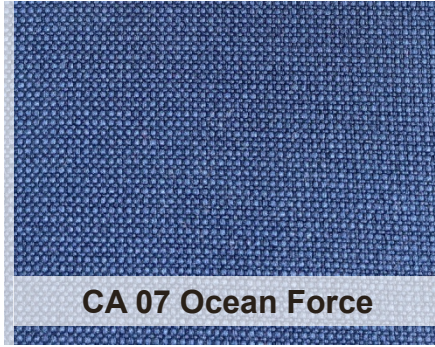


CA 07 Ocean Force



CA 08 Indian Coffee



CA 09 Orient

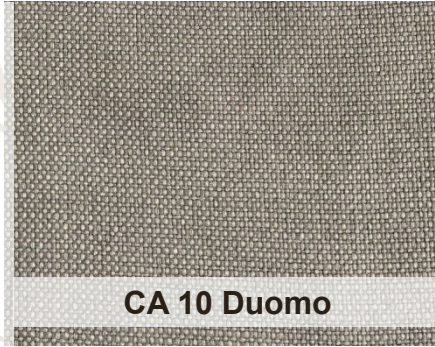


CA 10 Duomo



CA 11 Pink




CA 12 Orange Spark

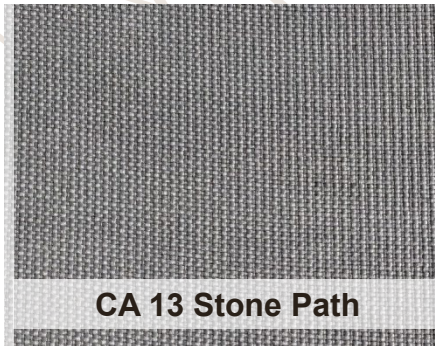


CA 13 Stone Path




CA 14 Azazon

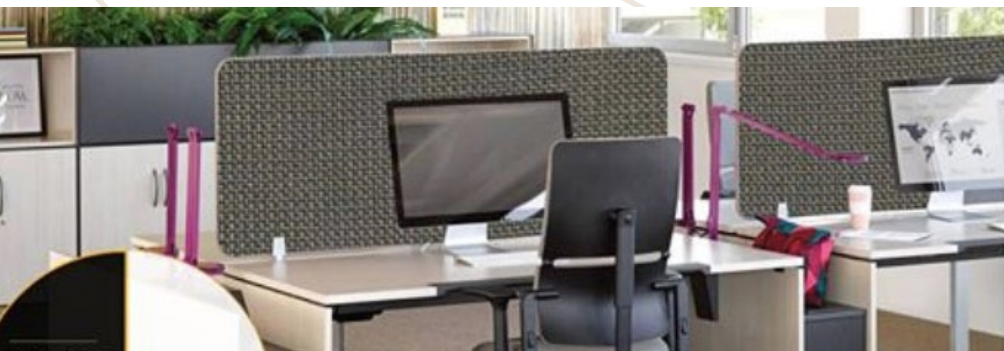


CA 15 Greysto

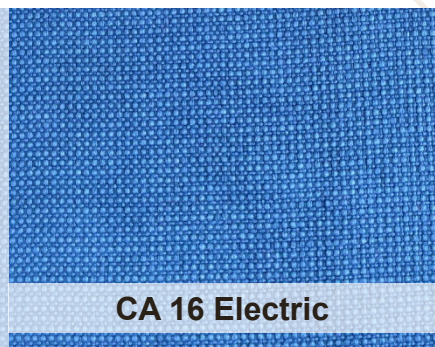

CA 16 Electric

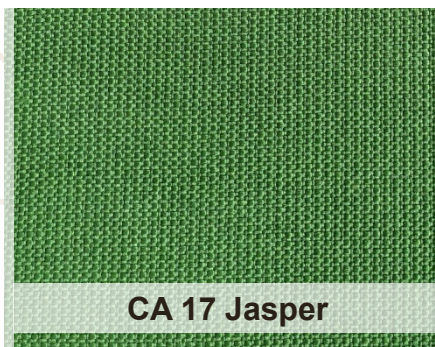

CA 17 Jasper

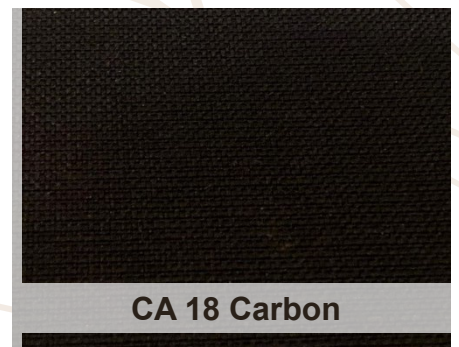

CA 18 Carbon



Click here to chat with us



CARA




Composition	100% Polyester
Weight	475 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 90,000 Cycles Martindale Abrasion tester at 12KPA Pressure.
Flammability	BS EN 1021-1 : 1994 (Cigarette) BS 7176 : 1995 Low Hazard Flammability performance is dependent on the combination of material used.
Fastness to Light	5+[BS: 1006 (1990)]
Fastness to Rubbing	Wet : 5 & Dry : 4-5
Color Matching	Batch to batch Variations in shade may occur within commercial tolerances.




Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com

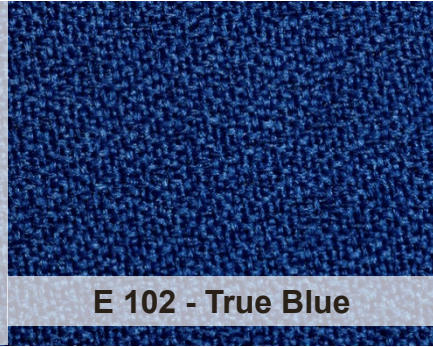


E 102 - True Blue

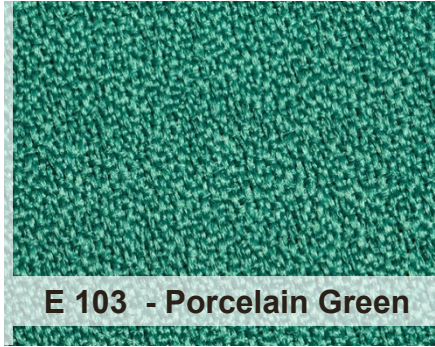

E 103 - Porcelain Green



E 105 - Melanze

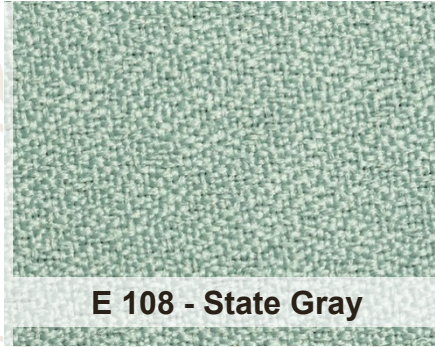


E 108 - State Gray




E 109 - Pesto



E 114 - Flame Red

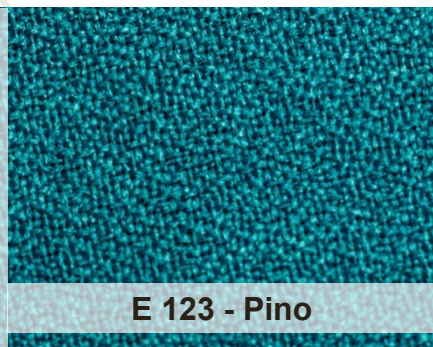

E 123 - Pino

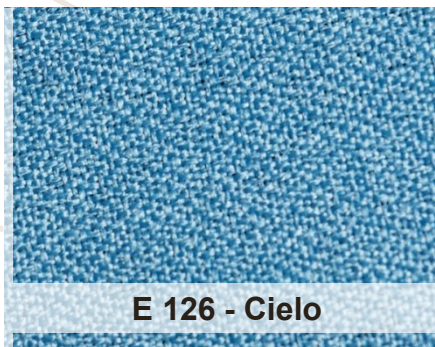

E 126 - Cielo



E 128 - Acorn



E 138 - Margerita



Click here to chat with us






E 140 - Black



E 151 - Lemon

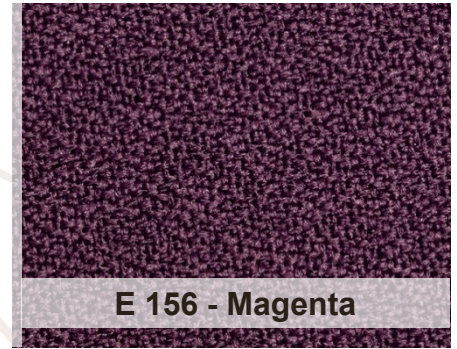

E 156 - Magenta




E 157 - Cinnamon



E 169 - Azure



E 181 - Dago Orange

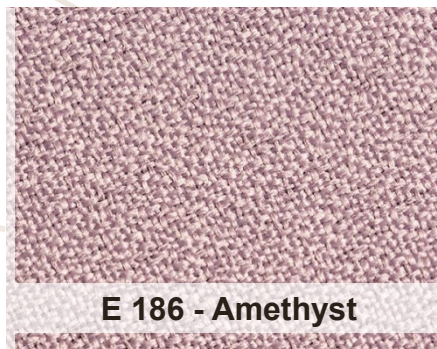


E 186 - Amethyst




E 188 - Clouds



E 191 - Med Blue

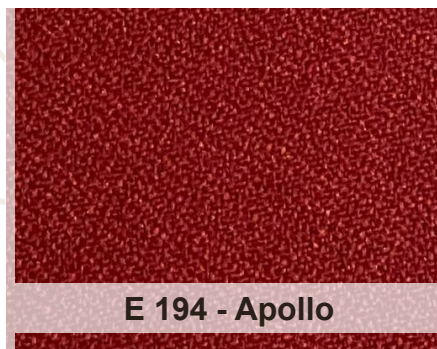

E 194 - Apollo

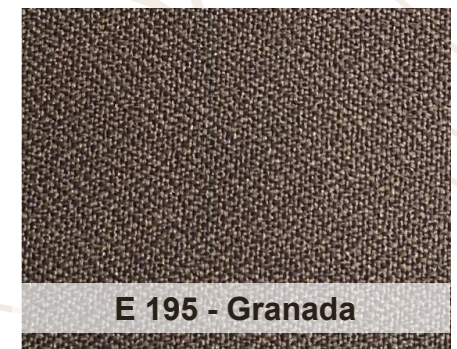

E 195 - Granada




Click here to chat with us






E 196 - Forest

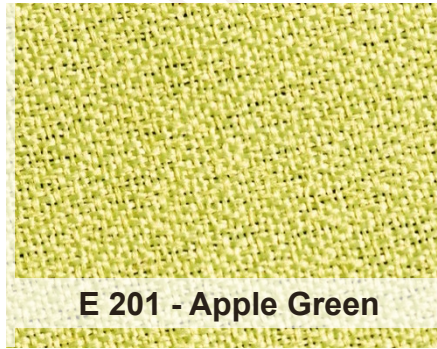

E 201 - Apple Green

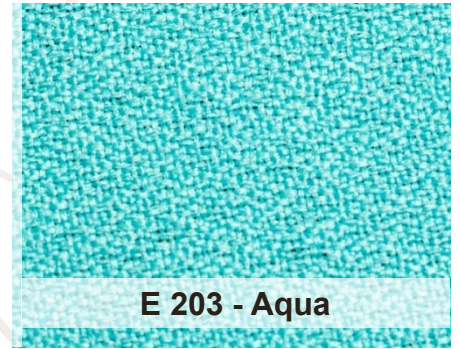

E 203 - Aqua



E 204 - Steel



E 205 - Caramel



E 212 - Blush



E 214 - Pink



E 225 - Frosty Spruce



E 226 - Ash



Click here to chat with us







E 5012




E 5016 - N. Blue

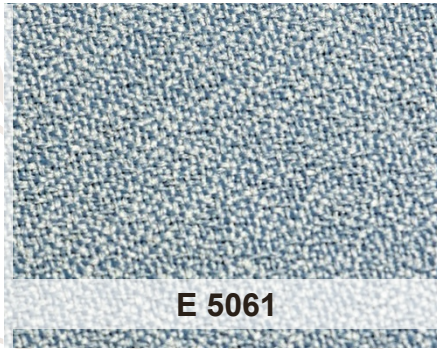

E 5061

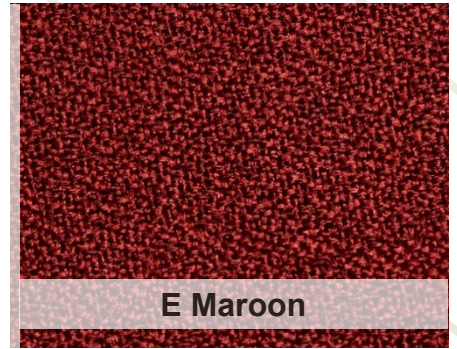

E Maroon

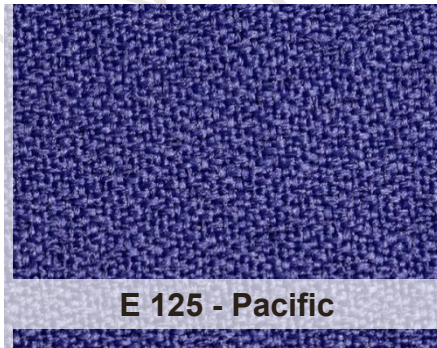

E 125 - Pacific




E 145 - Salmon



E 5034



E 5035

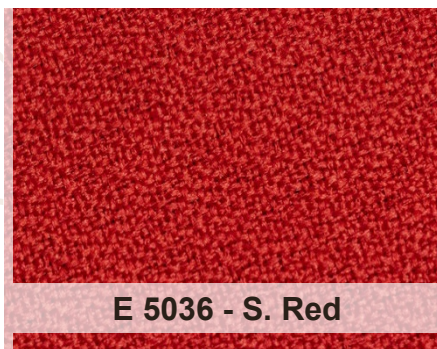

E 5036 - S. Red



E 5079



Click here to chat with us



TECHNICAL SPECIFICATION

ECLIPSE



Composition	100% Polyester
Weight	300 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 50,000 Cycles (800g/ 12kpa Martindale)
Fastness to Light	5 (ISO: 105-B02, 2000)
Fastness to Rubbing	Wet : 4-5 & Dry : 4-5
Maintenance	Professional cleaning is recommended
Colour Matching	Batch to batch Variations in shade may occur within commercial tolerances.
Option - 1	Fire retardant – Fabric will meet BS EN 1021 (Match) and IS: 1561-2002 when treated with FR extreme process.
Option - 2	Hydroguard – This special treatment is applied to provide water and stain repellency.

ResponseTM
Fabrics For The World's Best Offices

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.



Click here to
chat with us

www.responsefabrics.com

Delhi | Pune | Mumbai | Kolkata | Hyderabad | Bangalore |
Chennai



EL 01 Ginger Bread




EL 02 Verde



EL 03 Dark Forest



EL 04 Hazel Nut

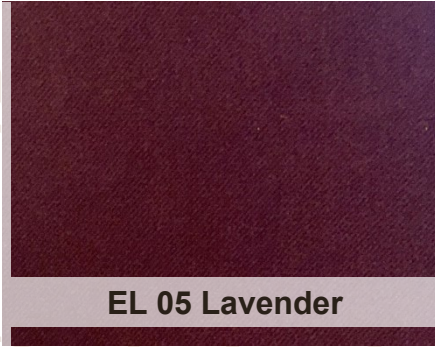

EL 05 Lavender



EL 06 Stone Path



EL 07 Roasted bean



EL 08 Indian Coffee




EL 09 Ocean Force



EL 10 Attenzione



EL 11 Greysto

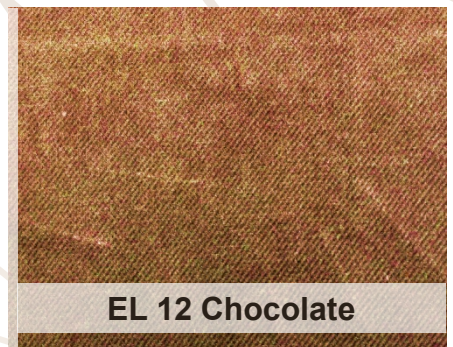


EL 12 Chocolate



EL 13 Rose



EL 14 Carbon

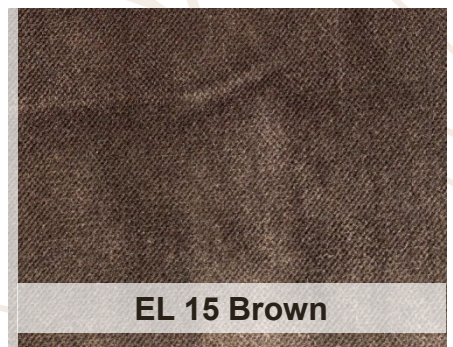

EL 15 Brown



Click here to chat with us



TECHNICAL SPECIFICATION

ELITE



Content	100% Polyester
Weight	540 grams per liner meter \pm 5%
Width	147 cms/58" \pm 2%
Flammability	BS 5852 (SOURCE 1) Match Flame BS 5852 (SOURCE - 0) Smoldering Cigarette BS 7176 Low Hazard
Colour Fastness to Light	ISO: 105 – B02 4.5 - 5
Colour Fastness to Rubbing	ISO - 105 – X12 Dry : 4.5 & Wet : 4.5
Abrasion Resistance	IS 12673 80,000 Cycles.
Fire Retardant Option	Fire retardant treatment can be done on fabric as per requirement of client.
Water Repellent Option	Water Repellent treatment of Hydrogard can be done on fabric as per requirement of client.
Cleaning Instruction	Clean with water based cleaning agents, foam or pure water free solvents. Vaccuming or light brushing is recommended to prevent dust and soil build up.

ResponseTM
Fabrics
Fabrics For The World's Best Offices



Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com

Delhi | Pune | Mumbai | Kolkata | Hyderabad | Bangalore | Chennai



Click here to chat with us






SPECIFICATION REQUIRED




Click here to chat with us




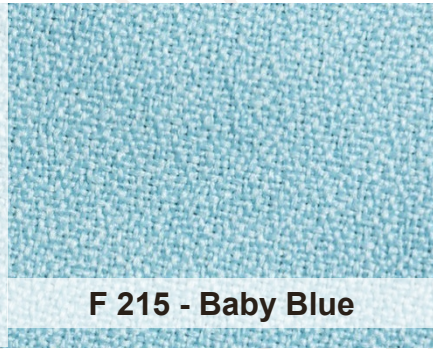


F 215 - Baby Blue

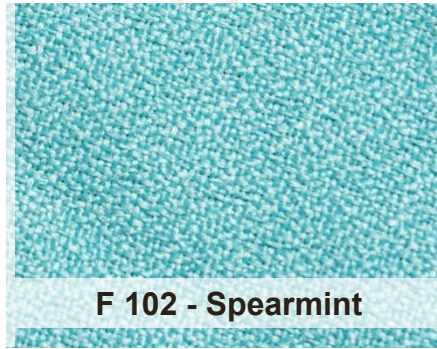

F 102 - Spearmint

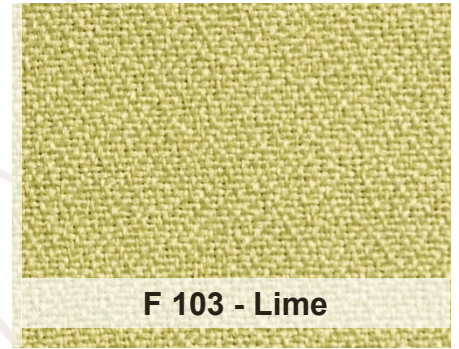


F 103 - Lime

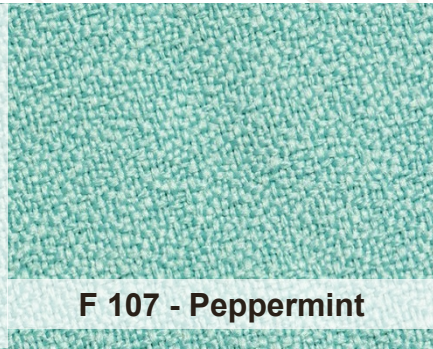

F 107 - Peppermint



F 108 - Waterfall

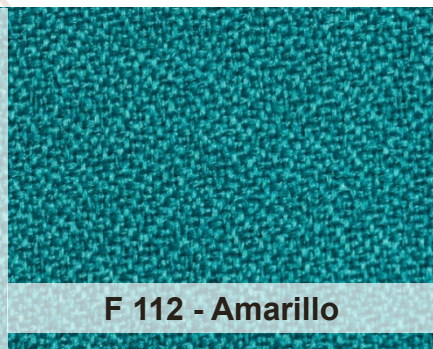

F 112 - Amarillo



F 116 - Brumble



F 117 - Foresh



F 122 - Mink



F 123 - Flame



F 126 - Granada




Click here to
chat with us





F 128 - Acorn

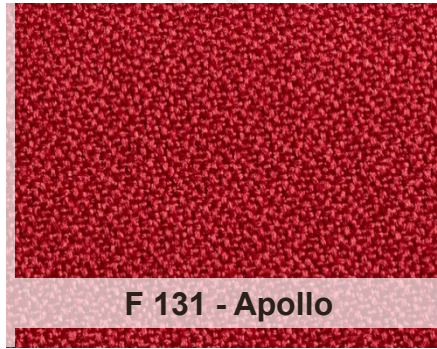

F 131 - Apollo



F 132 - Caramel



F 137 - Black



F 145 - Salmon



F 146 - Brown



F 148 - Sangria



F 149 - Burnt Orange



F 150 - Planet



F 151 - Lemon



F 152 - Ruby



F 154 - Mocca



Click here to chat with us







F 156 - Magenta




F 157 - Cinnamon

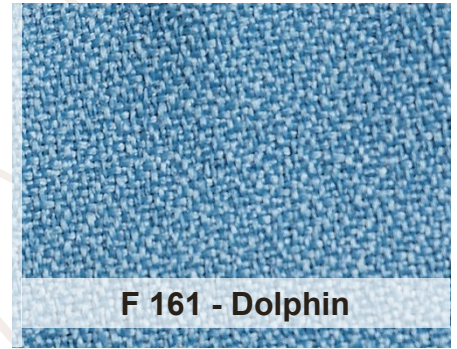

F 161 - Dolphin

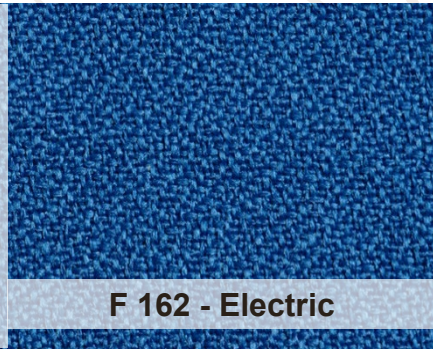

F 162 - Electric

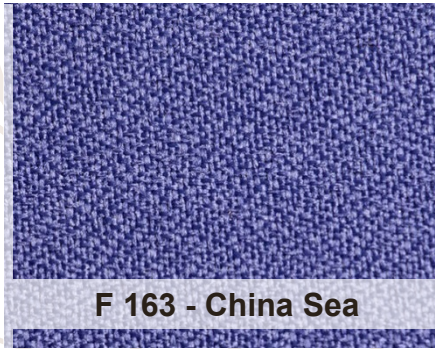

F 163 - China Sea



F 164 - Corn Flower



F 169 - Azure



F 174 - Indigo




F 178 - Fern



F 180 - Dago Green



F 181 - Dago Orange

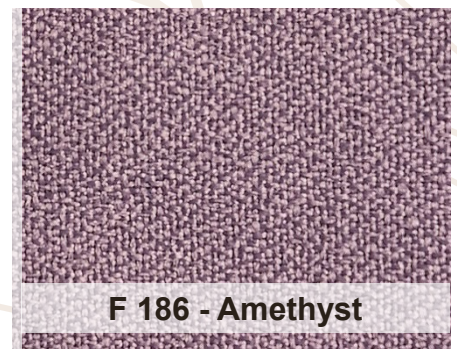

F 186 - Amethyst



Click here to chat with us






F 187 - Pearl




F 188 - Clouds

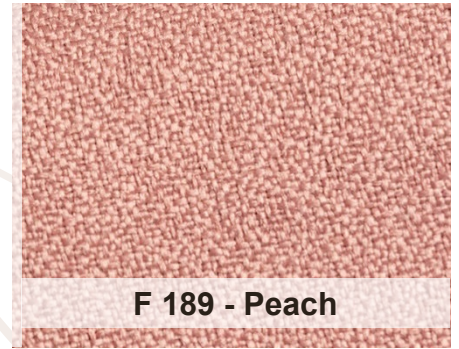

F 189 - Peach



F 190 - Shimmer

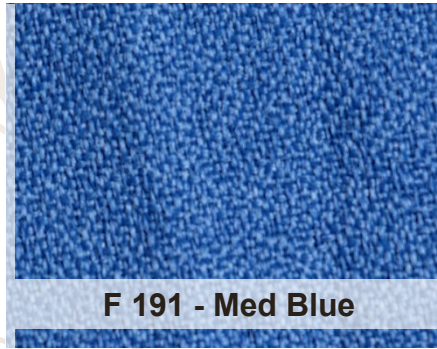

F 191 - Med Blue



F 192 - Med Gray



F 193 - Gungrey



F 194 - Wine




F 207 - Acid




Click here to chat with us



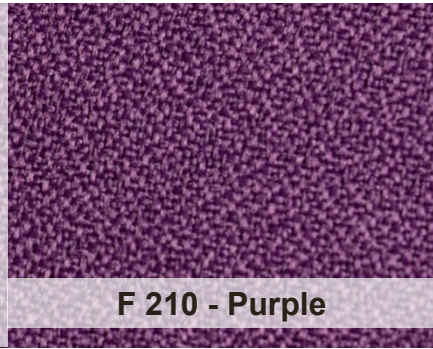


F 210 - Purple

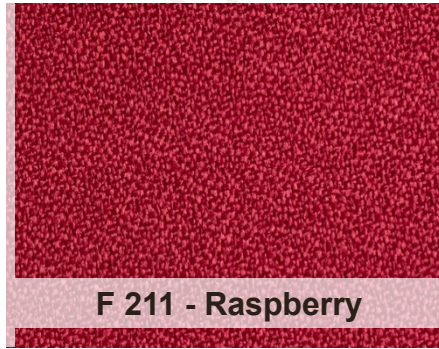

F 211 - Raspberry



F 212 - Blush

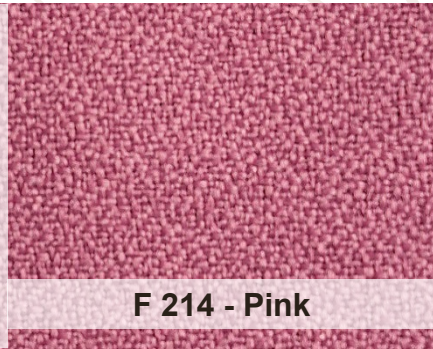

F 214 - Pink




F 316 - Tangerine



F 330 - Lavender



F 333 - Greysto

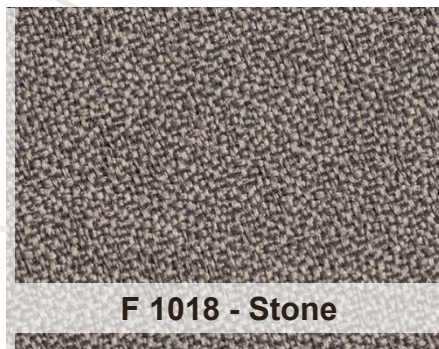

F 1018 - Stone



F 1019 - P Green



F 1020 - Snowwhite



F 1021 - Olive



F 5051 - D Rust



Click here to chat with us



FESTIVAL




Composition	100% Polyester
Weight	375 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 90,000 Cycles Martindale Abrasion tester at 12KPA Pressure.
Flammability	BS EN 1021-1 : 1994 (Cigarette) BS 7176 : 1995 Low Hazard Flammability performance is dependent on the combination of material used.
Fastness to Light	5+[BS 1006 (1990)]
Fastness to Rubbing	Wet : 5 & Dry : 4.5
Flame Retardant Option	Festival will meet BS EN 1021 (Match) and IS : 15061–2002, when treated with our flammliq® process
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Hydroguard	This special treatment is applied to provide water and stain repellency available on request.




Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.


 www.responsefabrics.com

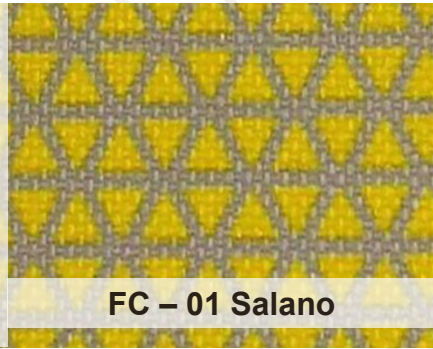

FC – 01 Salano

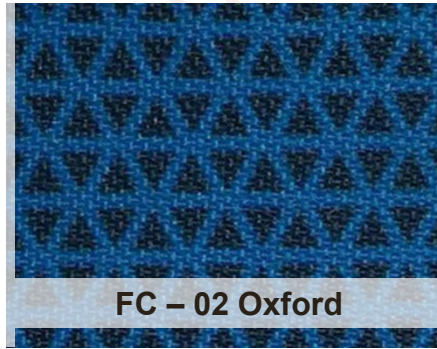

FC – 02 Oxford

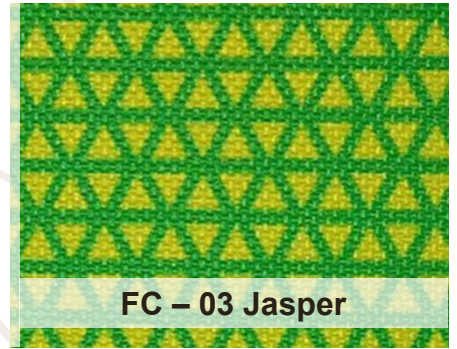

FC – 03 Jasper




FC – 04 Gold Smith



FC – 05 Oriel



FC – 06 Beacon

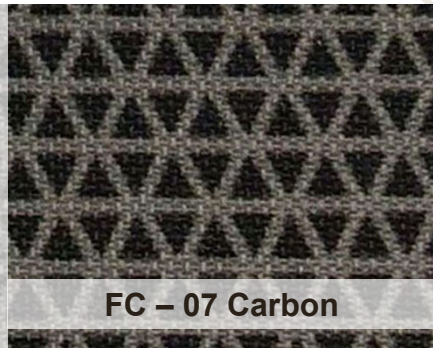

FC – 07 Carbon



FC – 08 Garden



Click here to chat with us



FOCUS



Composition	100% polyester
Weight	430 grams per liner meter
Width	140cms/55* +/-2%
Abrasion	In excess of 90,000 Cycles Martindale Abrasion tester at 12KPA Pressure
Flammability	BS EN 1021- 1994(Cigarette) BS 7176: 1995 Low Hazard
Fastness to Light	5+[BS 1006 (1990)]
Fastness to rubbing	Wet: 5 & Dry: 4.5
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Option - 1	Flame retardant option IS:15061- 2002, when treated with our Flammilq process.
Option - 2	Hydroguard – This special treatment is applied to provide water and stain repellency.






ResponseTM
Fabrics For The World's Best Offices

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.











Click here to
chat with us

www.responsefabrics.com

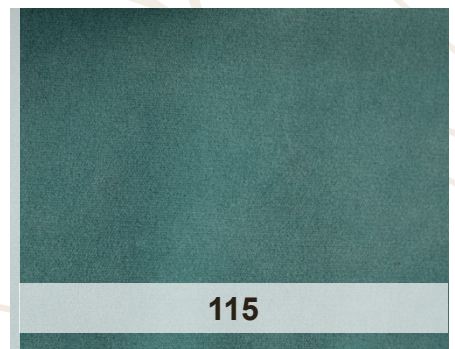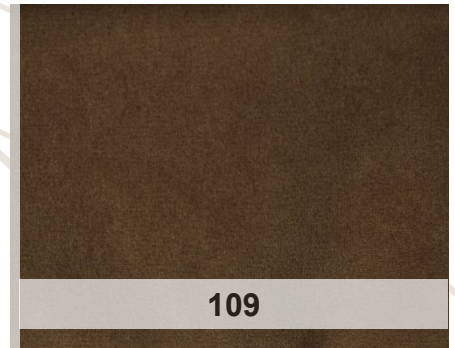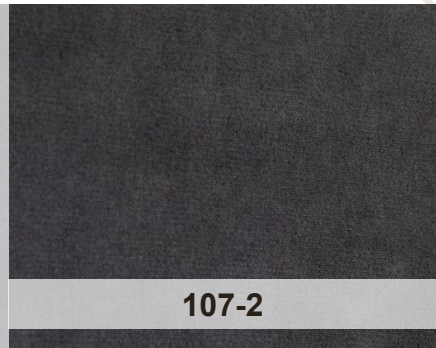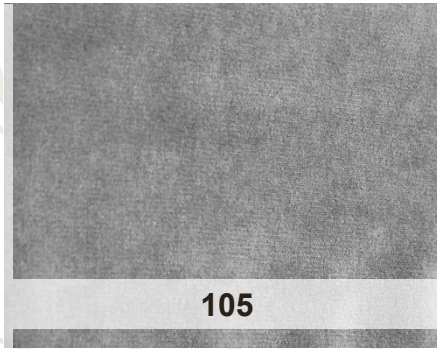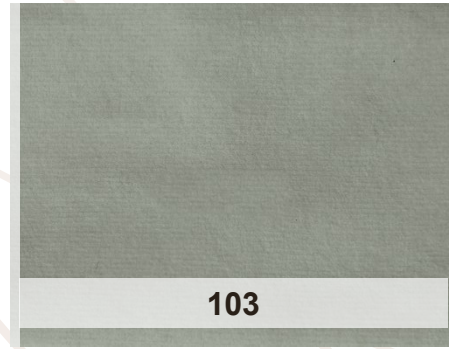

Click here to chat with us



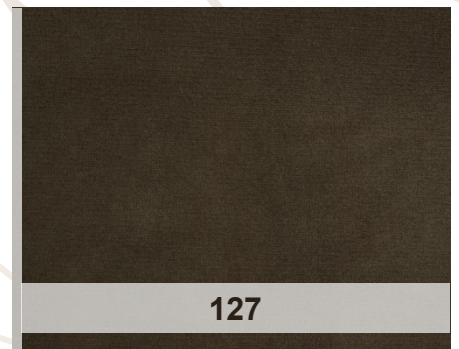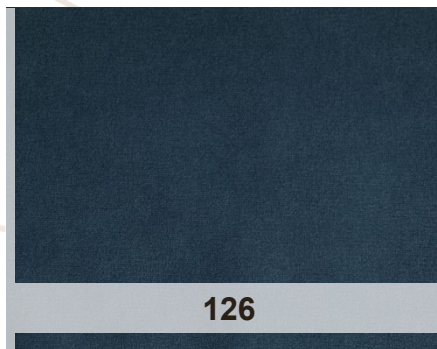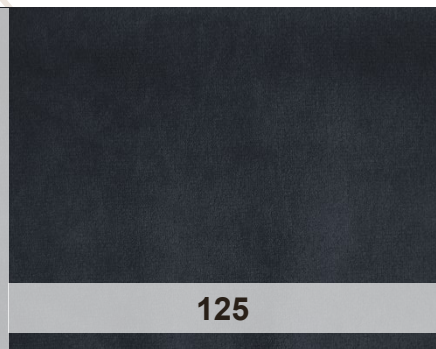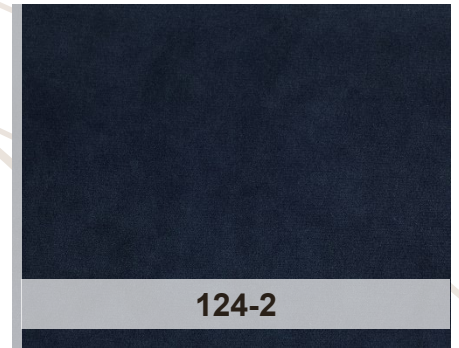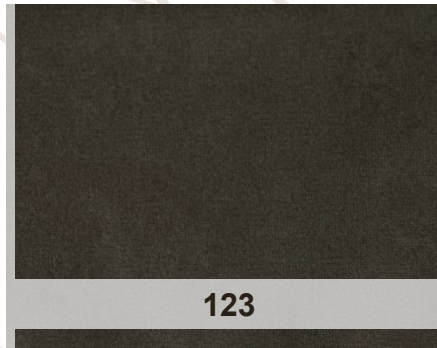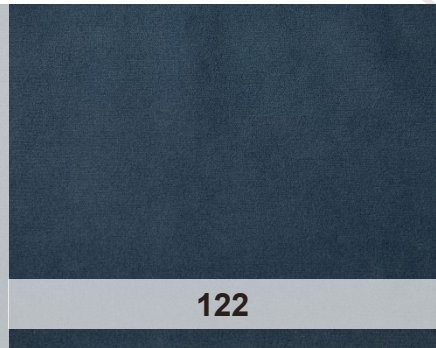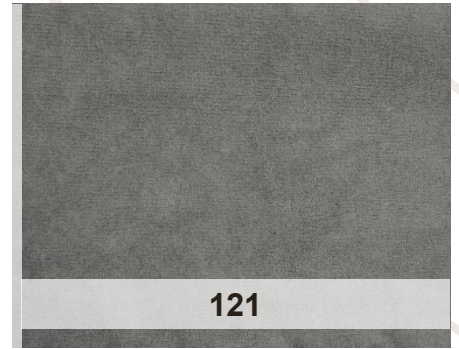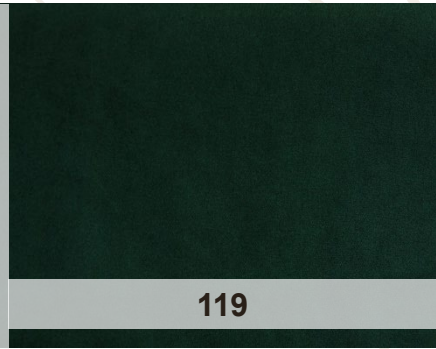

Click here to chat with us





SPECIFICATION REQUIRED




Click here to chat with us






HX 01 Stone Path

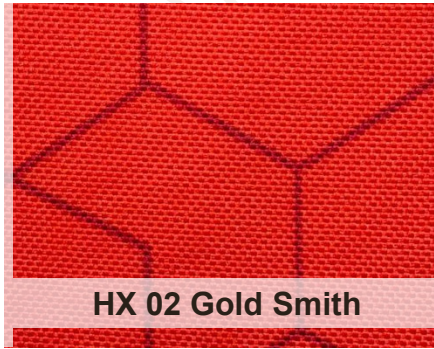


HX 02 Gold Smith

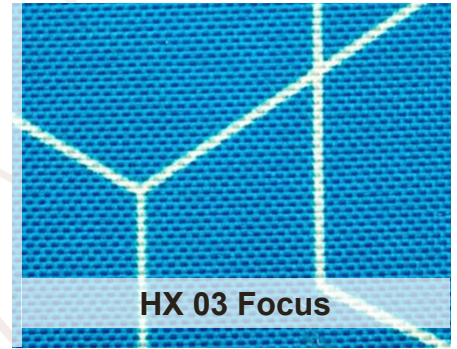

HX 03 Focus




HX 04 Relax

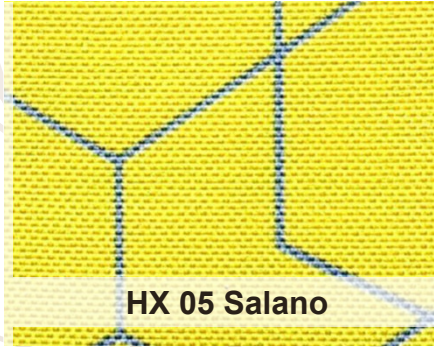

HX 05 Salano



HX 06 Compose

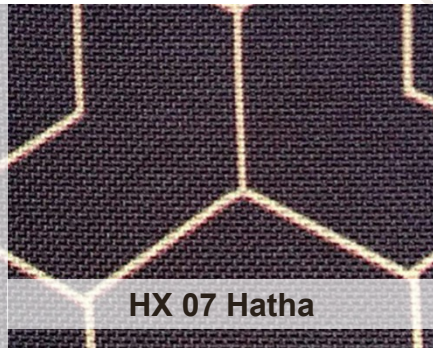

HX 07 Hatha



HX 08 Acron



Click here to chat with us



HEXA




Composition	100% Polyester
Weight	430 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 90,000 Cycles Martindale Abrasion tester at 12KPA Pressure.
Flammability	BS EN 1021-1 : 1994 (Cigarette) BS 7176 : 1995 Low Hazard Flammability performance is dependent on the combination of material used.
Fastness to Light	5+[BS 1006 (1990)]
Fastness to Rubbing	Wet : 5 & Dry : 4.5
Flame Retardant Option	IS : 15061-2002, when treated with our Flammliq [®] process.
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Hydroguard	This special treatment is applied to provide water and stain repellency available on request.




Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.


www.responsefabrics.com

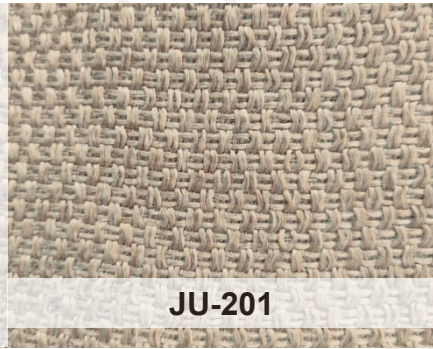


JU-201

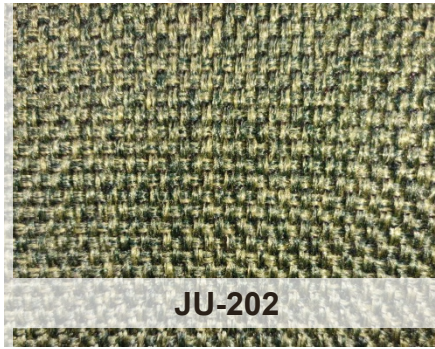

JU-202

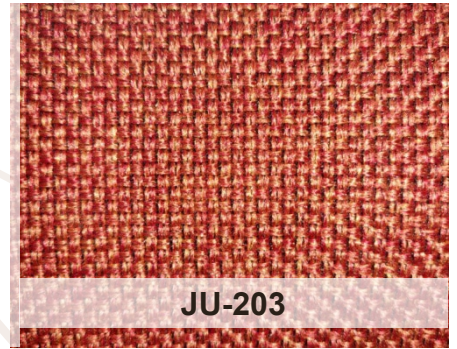

JU-203

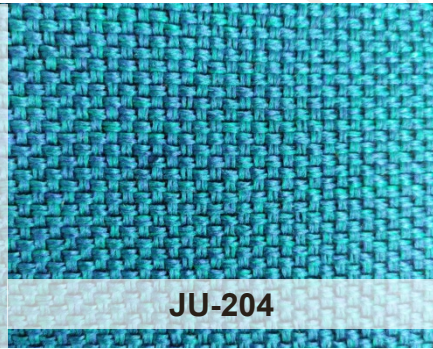


JU-204




JU-205




JU-206

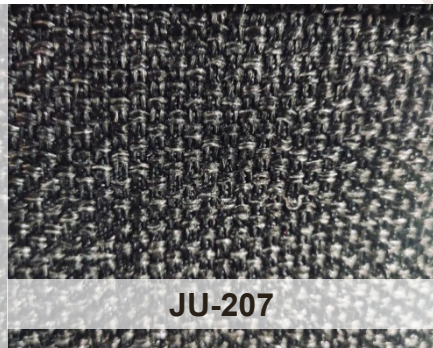


JU-207

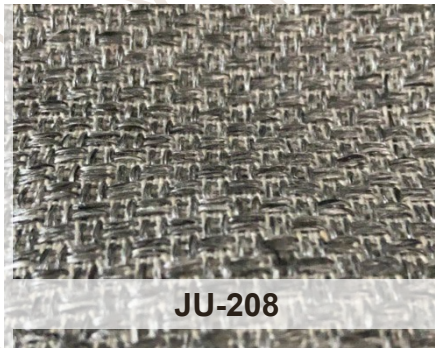

JU-208

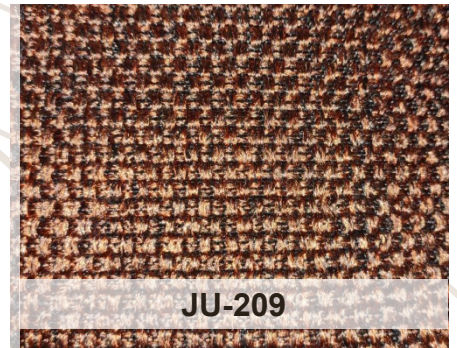

JU-209

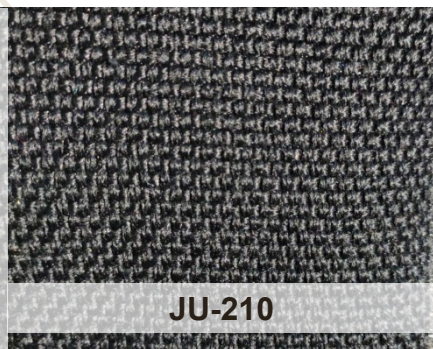

JU-210



JU-211




Click here to chat with us







JU-212

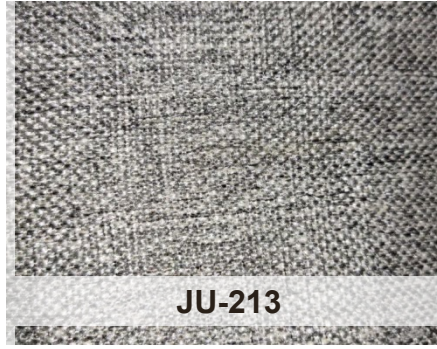

JU-213

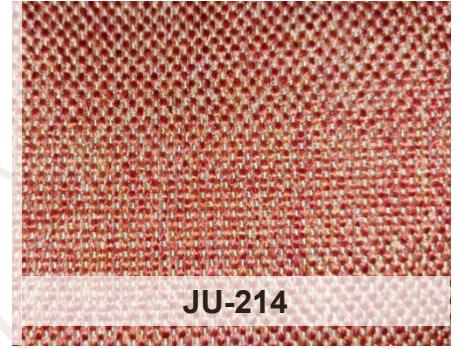

JU-214

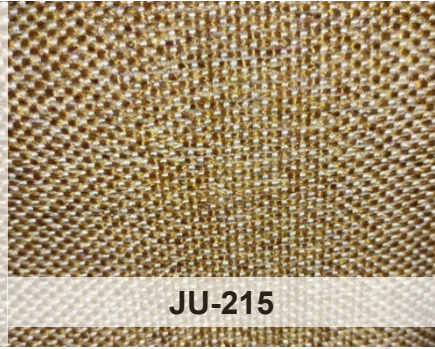


JU-215



JU-216



JU-217

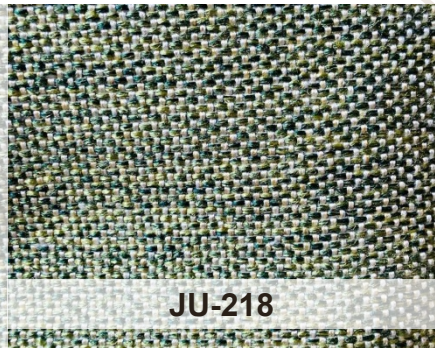

JU-218



JU-219



JU-220



Click here to chat with us



JUTE



Composition	100% Polyester
Width	140 cms/55" ± 2%
Abrasion	In excess of 50,000 Cycles (800g/12kpa) Martindale
Fastness to Light	5 (ISO : 105-B02, 2000)
Fastness to Rubbing	Wet : 4-5 & Dry : 4-5
Maintenance	Professional cleaning is recommended.
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Option : 1	Fire retardant – Fabric will meet BS EN 1021 (Match) and IS: 1561-2002 when treated with FR extreme process.
Option : 2	Hydroguard – This special treatment is applied to provide water and strain repellency.






ResponseTM
Fabrics For The World's Best Offices



Click here to
chat with us








Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com

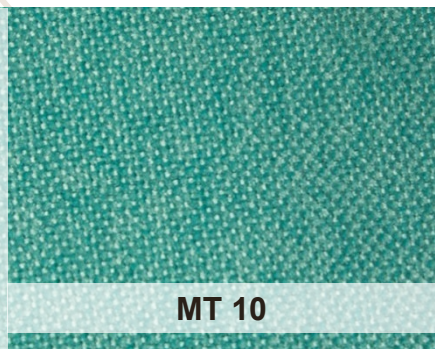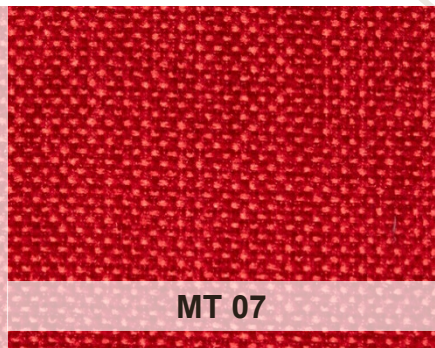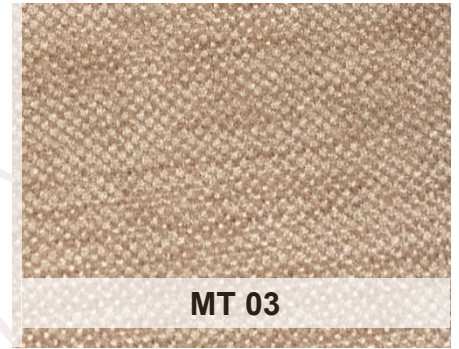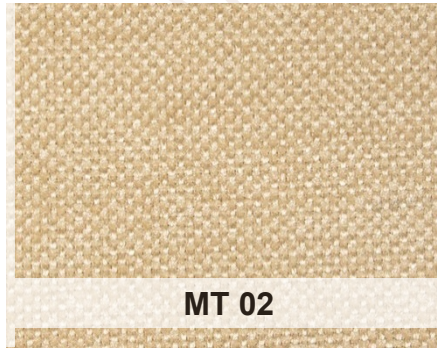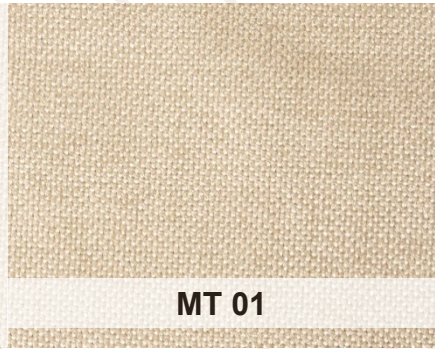

Click here to chat with us



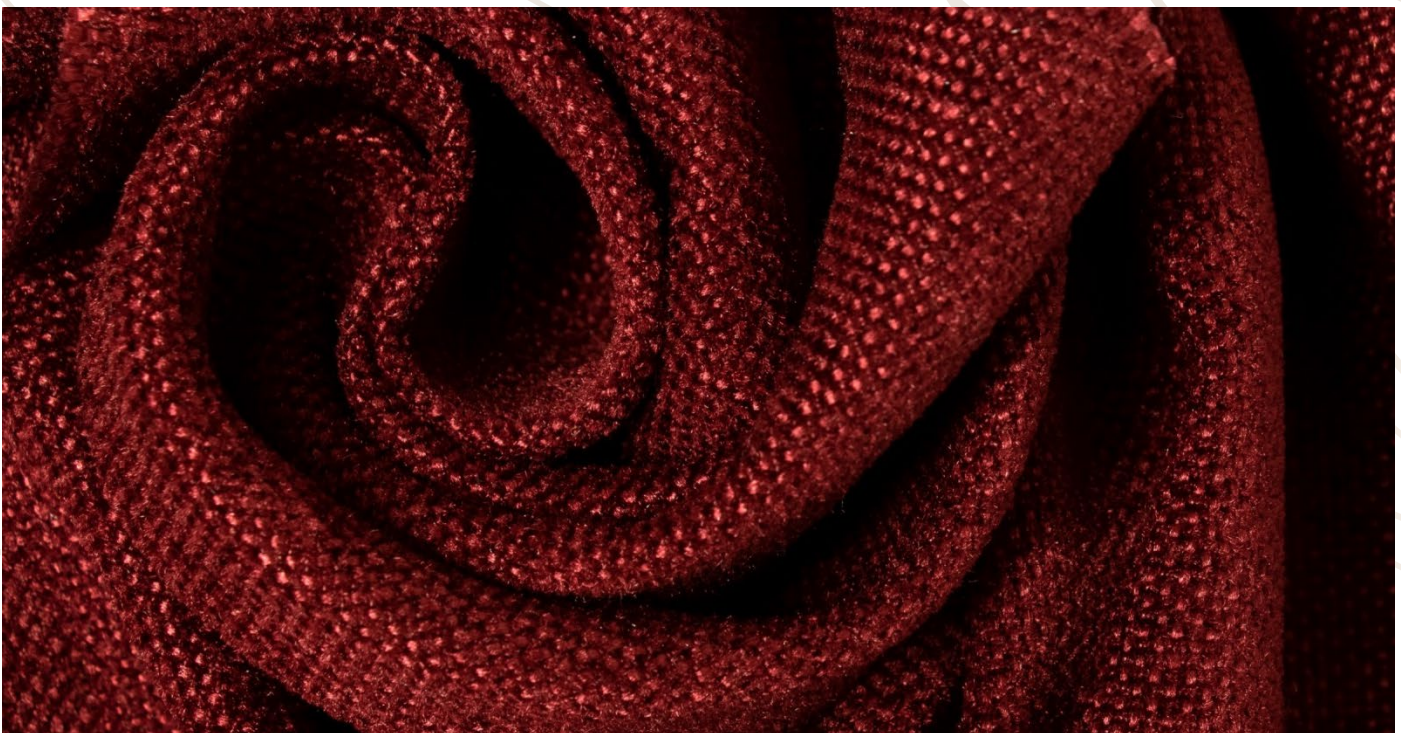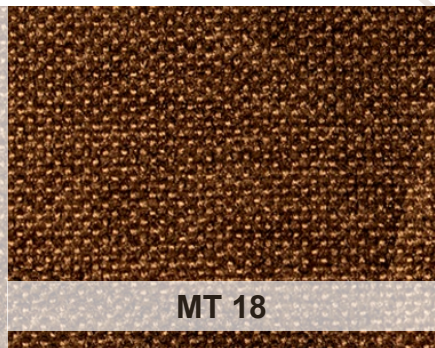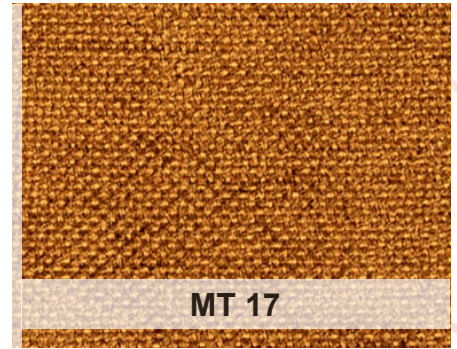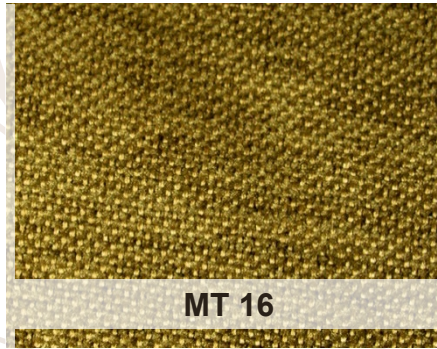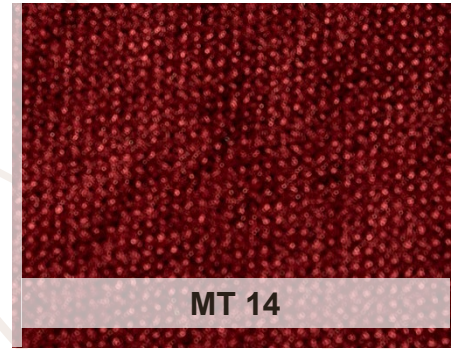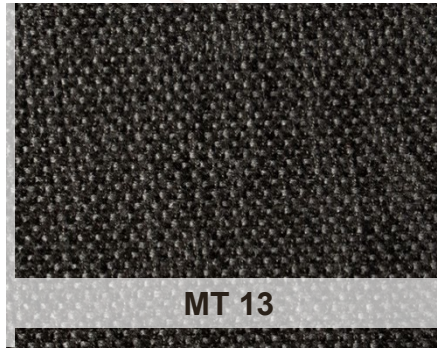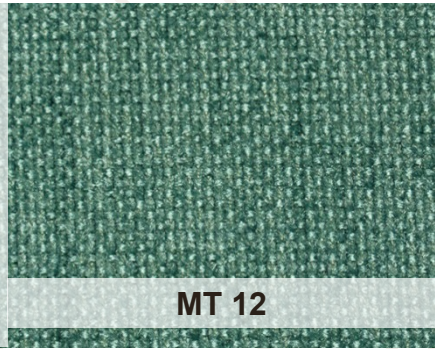

Click here to chat with us



TECHNICAL SPECIFICATION

MANTHAN



Composition	100% Polyester
Width	137 cms/54" ± 2%
Weight	507 grams per liner meter ± 5%
Abrasion Resistance	45,000 Cycles (Martindale : ISO12947-2;1988)
Fastness to Light	5 (ISO: 105-B02,2000)
Fastness to Rubbing	Dry : 4 & Wet : 4-5 (IS:766;1988 reaffirmed 2004)
Maintenance	Professional cleaning is recommended
Colour Matching	Batch to batch variations in shade may be occur within commercial tolerances.
Fire Retardant	BS EN 1021-1:1994 (Cigarette Test) Pass BS EN 1021-2:1994 (Match Flame Test) Pass



Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com

Delhi | Pune | Mumbai | Kolkata | Hyderabad | Bangalore | Chennai



MS 401 - Baby Blue



MS 402 - Dolphin



MS 403 - Electric




MS 404 - Amalfi



MS 405 - Med Blue




MS 406 - Corn Flower

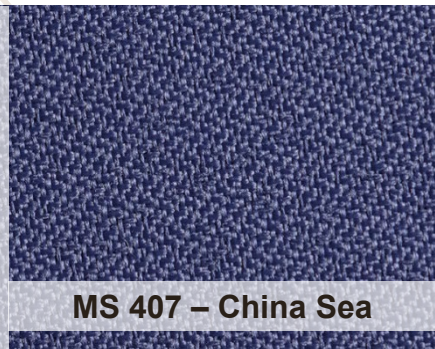

MS 407 - China Sea



MS 409 - Waterfall

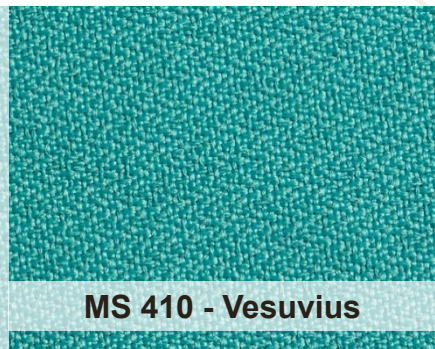

MS 410 - Vesuvius



MS 411 - Turchino



Click here to chat with us





MS 412 - Lilac



MS 413 - Blush




MS 414 - Fuscina



MS 415 - Pink



MS 416 - Lavender

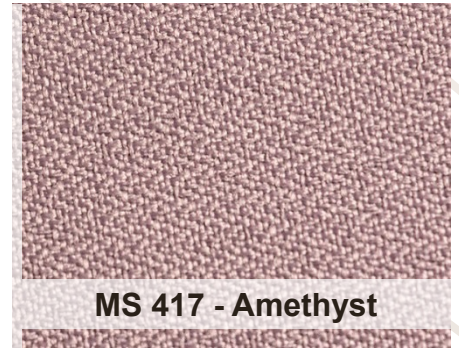

MS 417 - Amethyst



MS 418 - Flame



MS 419 - Aattenzione



MS 420 - Fresco



MS 421 - Burnt Orange



MS 422 - Cinnamon



Click here to chat with us





MS 423 - Warm Glow




MS 424 - Villa De Sole



MS 425 - Salmon



MS 426 - Dago Orange

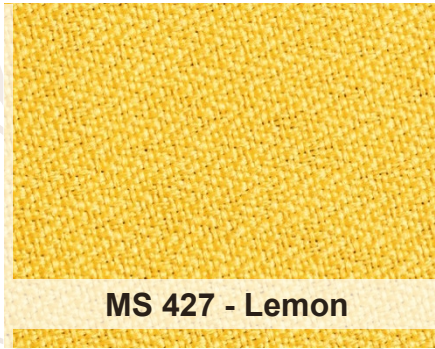


MS 427 - Lemon



MS 428 - Frengia



MS 429 - Neutro

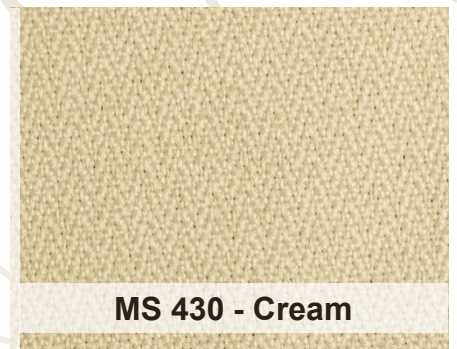

MS 430 - Cream



MS 431 - Peach Cream



MS 432 - Peach







MS 433 - Latte



Click here to chat with us



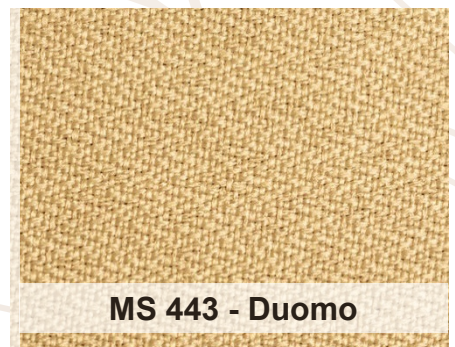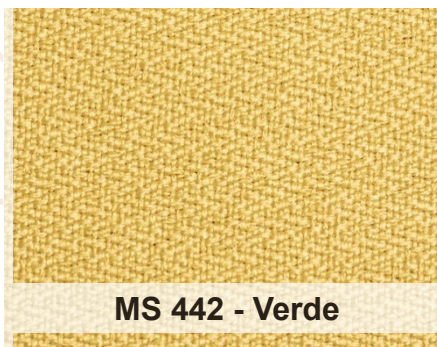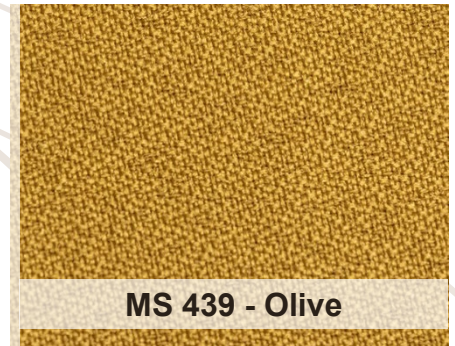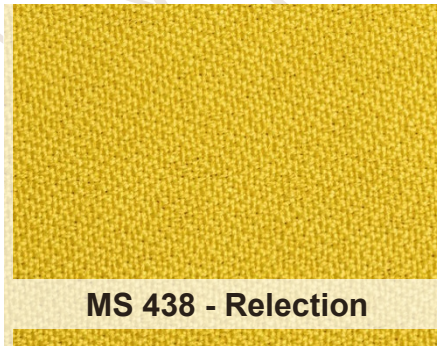

Click here to chat with us






MS 444 - Verona




MS 445 - Bramble

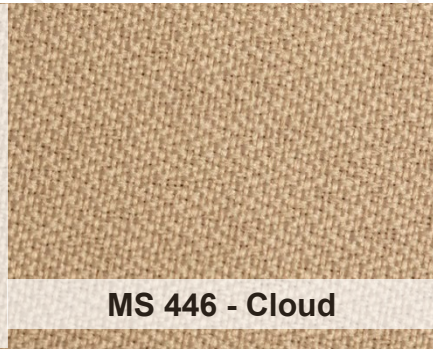

MS 446 - Cloud



MS 447 - Arno

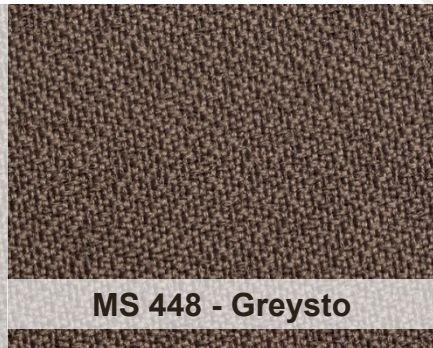

MS 448 - Greysto



MS 449 - Mink



MS 450 - Acid



MS 451 - Gargoyle



MS 452 - Granada



MS 453 - Black



Click here to chat with us

MARS



Composition	100% Polyester
Weight	340 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 60,000 Cycles Martindale Abrasion tester at 12KPA Pressure.
Flammability	BS EN 1021 - 1 : 1994 (Cigarette) BS 7176 : 1995 Low Hazard Flammability performance is dependent on the combination of material used.
Fastness to Light	5 (ISO: 105-B02, 2000)
Fastness to Rubbing	Wet : 4-5 & Dry : 4-5
Option : 1	Fire retardant – Fabric will meet BS EN 1021 (Match) and IS: 15061-2002 when treated with FR extreme process.
Option : 2	Hydroguard – This special treatment is applied to provide water and strain repellency.



Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com



MS 2001 - Sea Ridge



MS 2002 - Caspia Sea



MS 2003 - Ocean Force



MS 2004 - Blue Ivy



MS 2005 - Night Sky



MS 2006 - Pink Blossom



MS 2007 - Rum N Raisin



MS 2008 - Purple Shell



MS 2009 - Golden Aura



MS 2010 - Orange Spark



MS 2011 - Cold Candy




MS 2012 - Vintage Rose



MS 2013 - Young Wine



MS 2015 - Old Brick

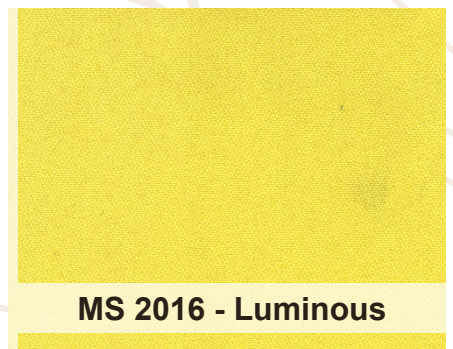

MS 2016 - Luminous



Click here to chat with us





MS 2017 - Victorian Gold



MS 2018 - Vitamin Bright



MS 2019 - Citrus




MS 2020 - Fresh Leaf



MS 2021 - Apple Green



MS 2022 - Jungle Cane

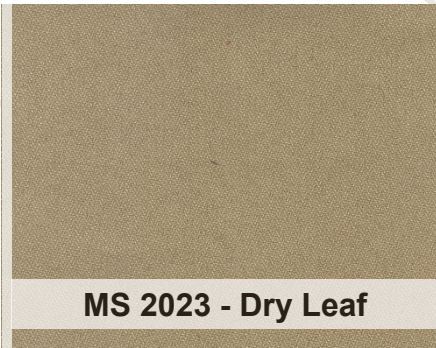


MS 2023 - Dry Leaf




MS 2024 - Droplet




MS 2025 - Conifer

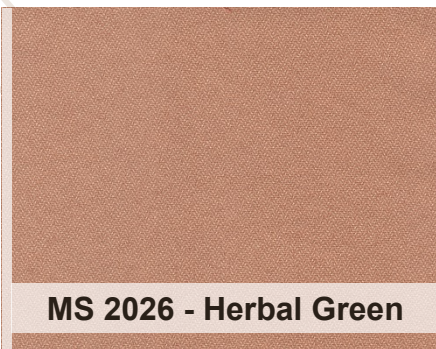

MS 2026 - Herbal Green

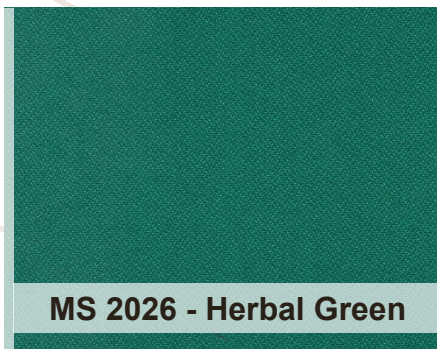

MS 2026 - Herbal Green

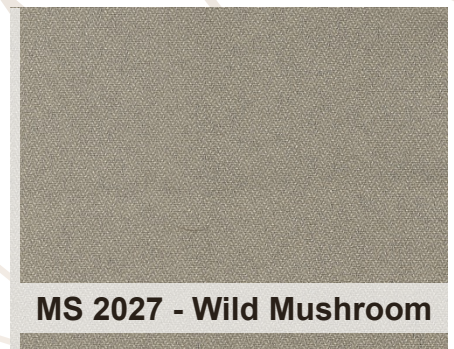

MS 2027 - Wild Mushroom



MS 2029 - Ginger Bread



MS 2030 - Roasted Beans



MS 2031 - Stone Path



Click here to chat with us



MARS 2




Composition	100% Polyester
Weight	340 grams per liner meter
Width	140 cms/55" ± 2%
Abrasion	In excess of 60,000 Cycles Martindale Abrasion tester at 12KPA Pressure.
Flammability	BS EN 1021 - 1 : 1994 (Cigarette) BS 7176 : 1995 Low Hazard Flammability performance is dependent on the combination of material used.
Fastness to Light	5 (ISO: 105-B02, 2000)
Fastness to Rubbing	Wet : 4-5 & Dry : 4-5
Option : 1	Fire retardant – Fabric will meet BS EN 1021 (Match) and IS: 15061-2002 when treated with FR extreme process.
Option : 2	Hydroguard – This special treatment is applied to provide water and strain repellency.




Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.


 www.responsefabrics.com

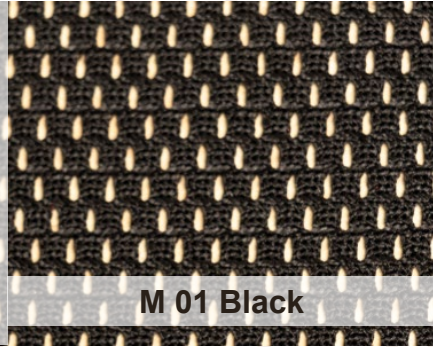


M 01 Black

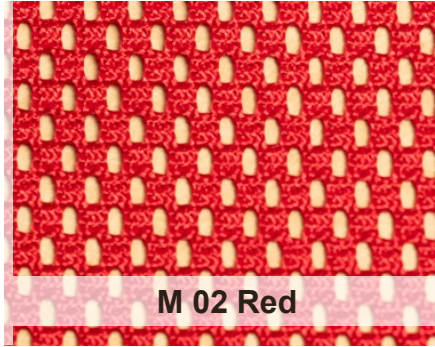




M 02 Red

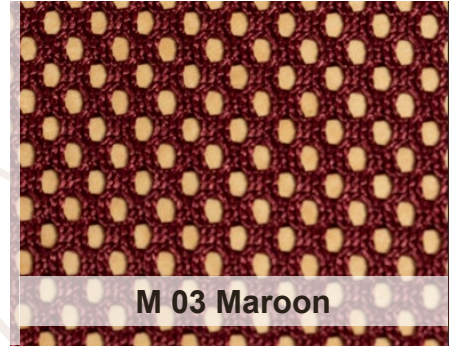


M 03 Maroon

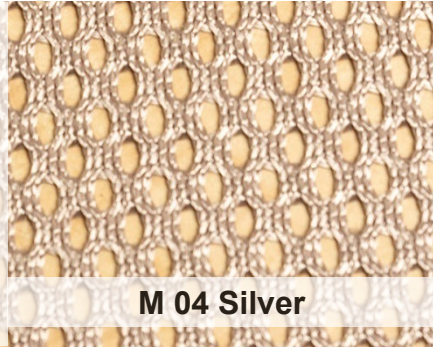


M 04 Silver

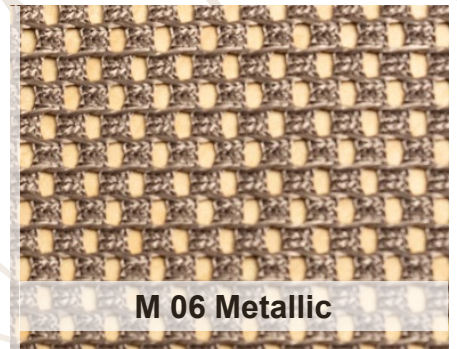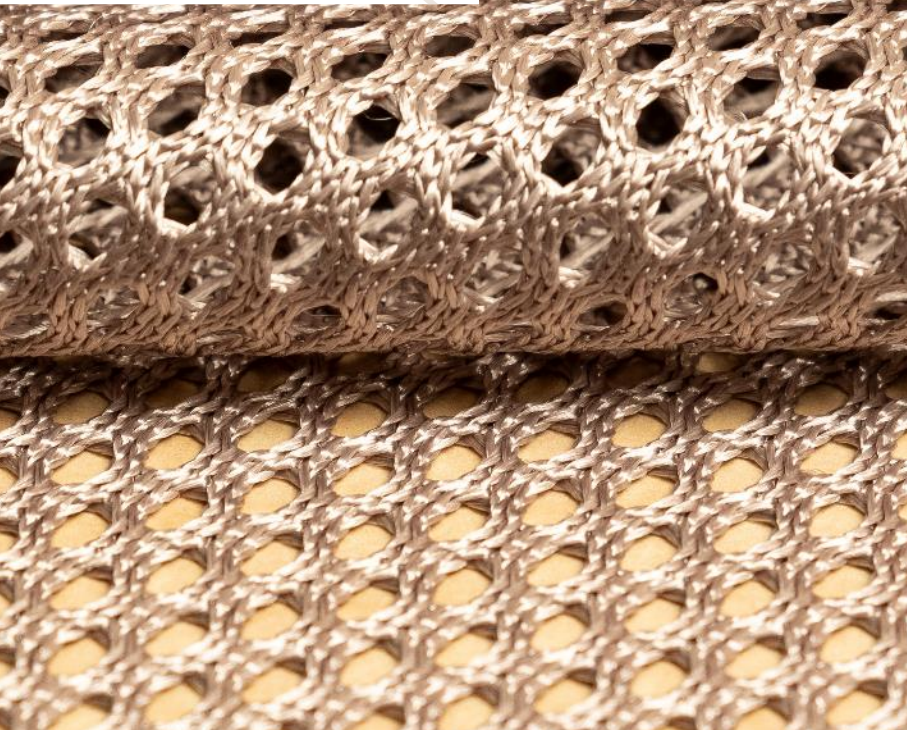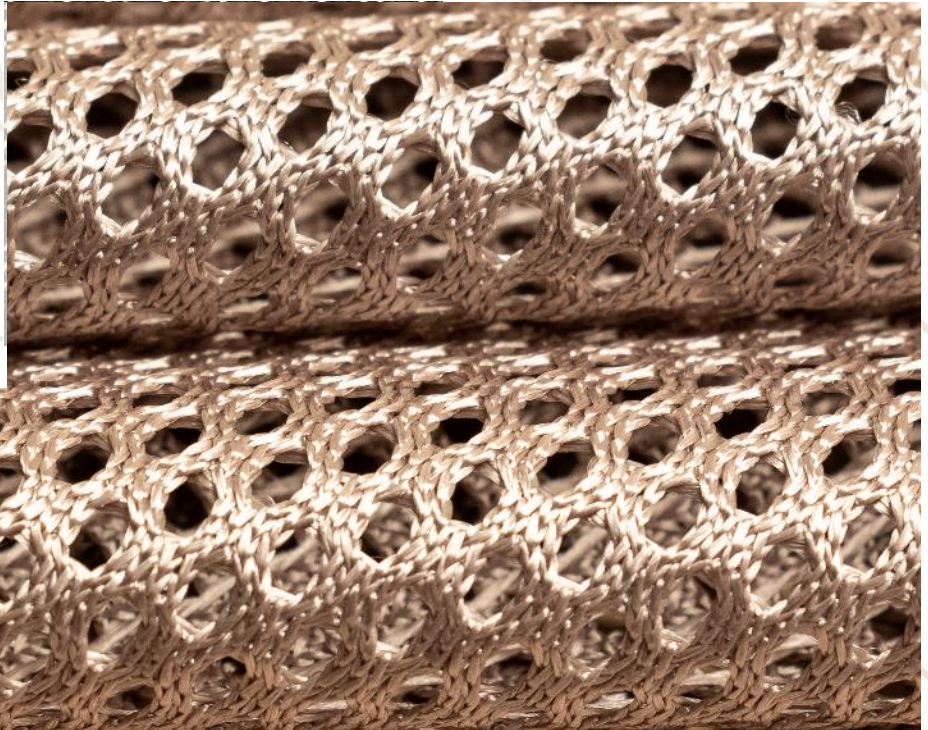


M 06 Metallic

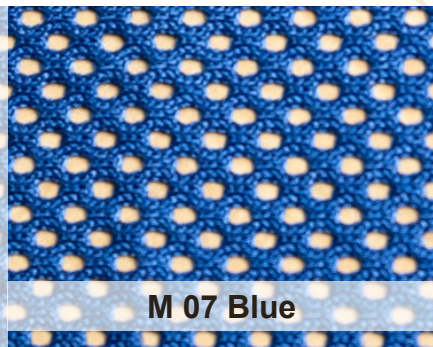

M 07 Blue

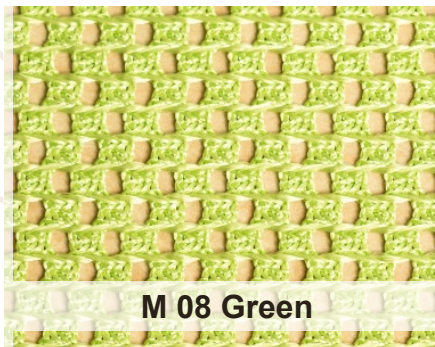

M 08 Green

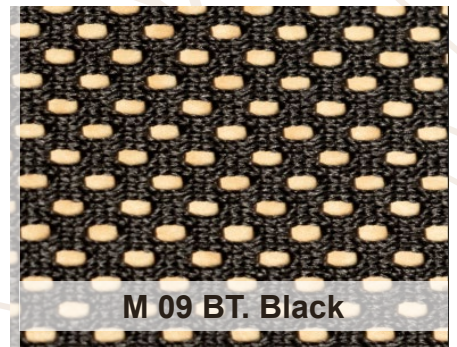


M 09 BT. Black



Click here to chat with us




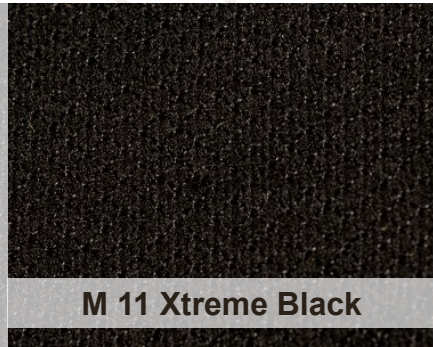

M 11 Xtreme Black



M 13 Mesh Stripe

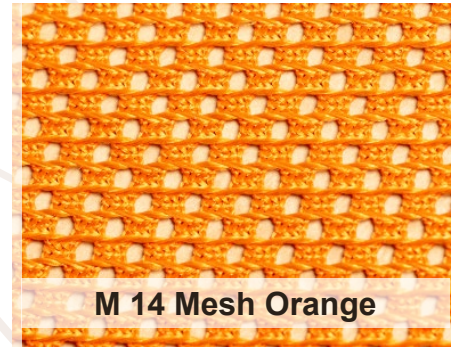


M 14 Mesh Orange



S 10 Spacer Black



S 15 Spacer Red

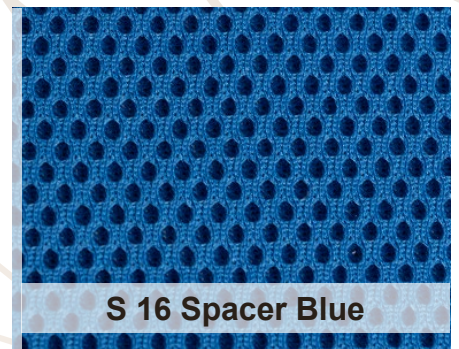

S 16 Spacer Blue



Click here to chat with us



MESH















Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.



Click here to
chat with us

www.responsefabrics.com

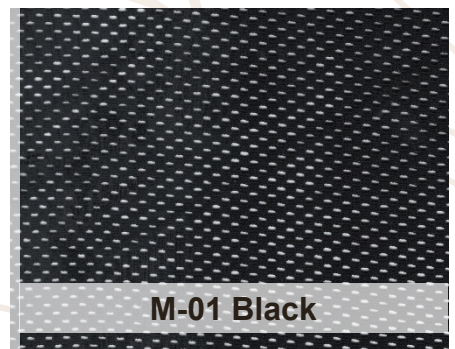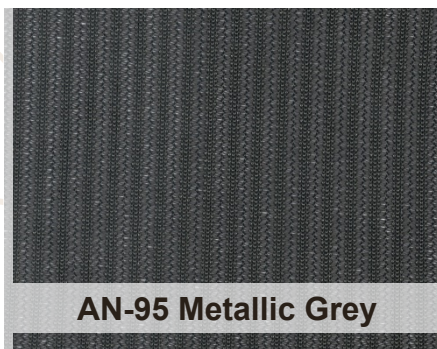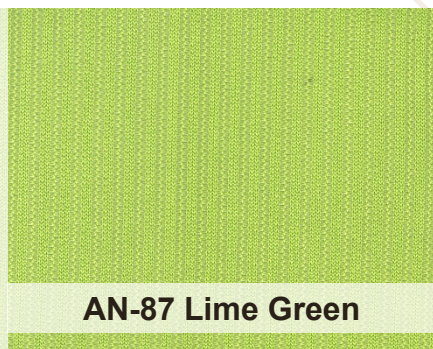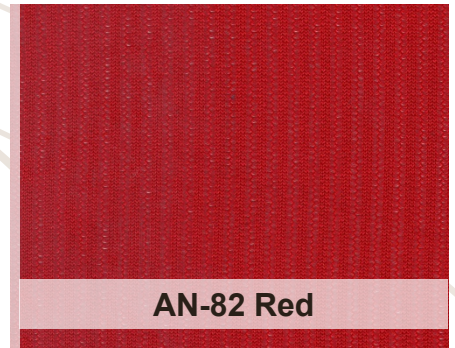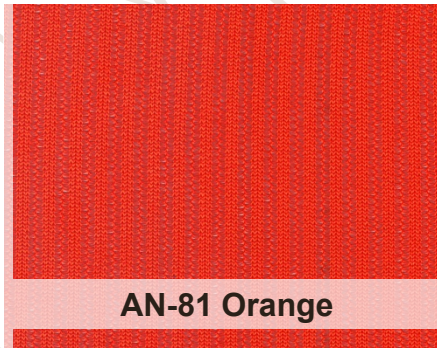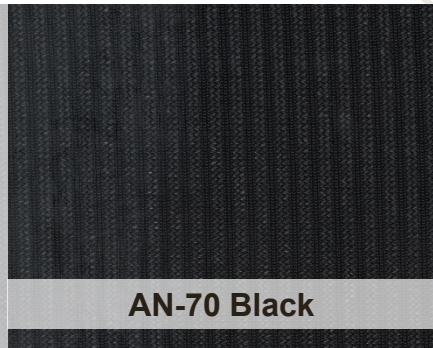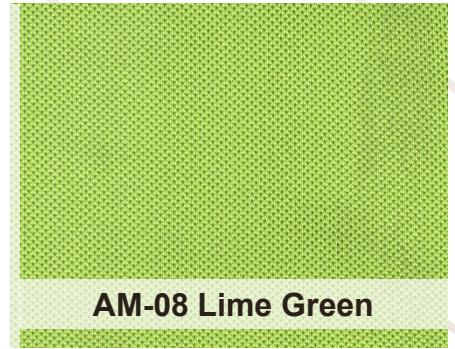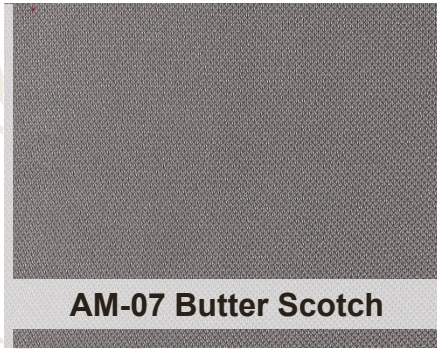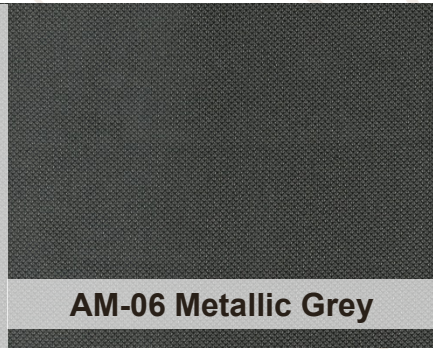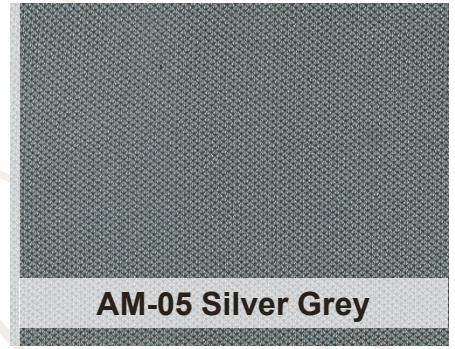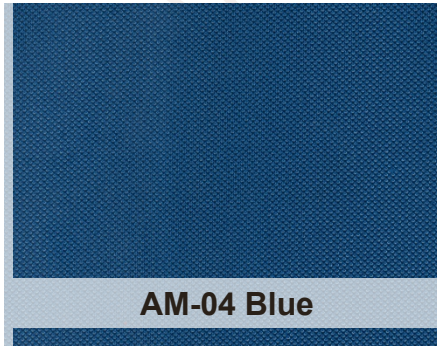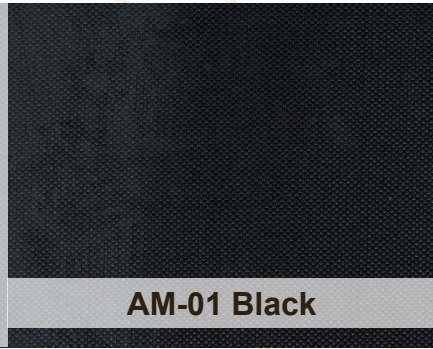

Click here to chat with us






M-04 Butter Scotch



M-06 Metallic Grey




M-08 Lime Green

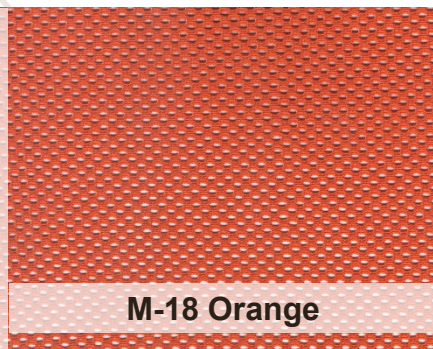

M-18 Orange



M-19 Red

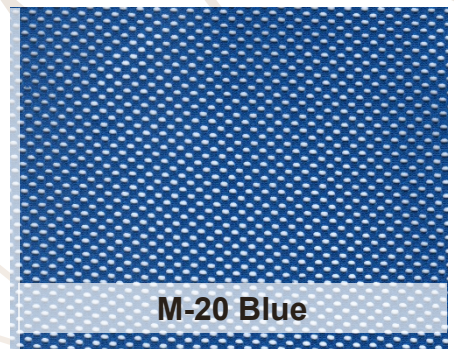

M-20 Blue



M-21 Silver Grey



Yuva-70 Black



Yva-75 Medium Grey



Click here to chat with us



MESH 2





Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.




Click here to
chat with us

www.responsefabrics.com

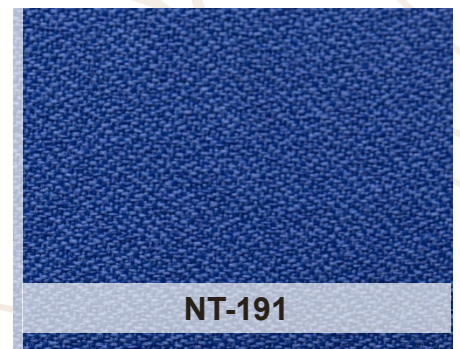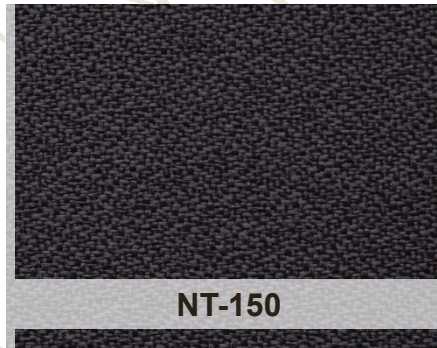

Click here to chat with us



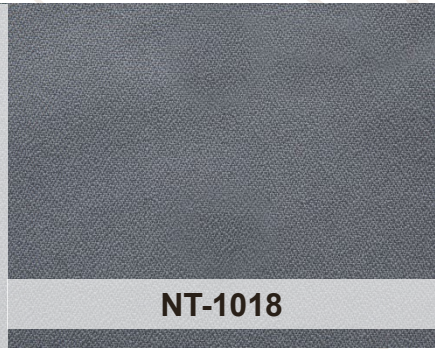

Click here to chat with us








SPECIFICATION REQUIRED



Click here to chat with us



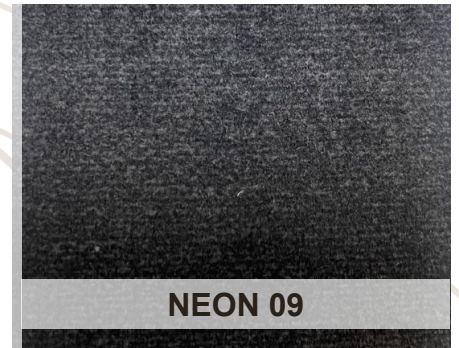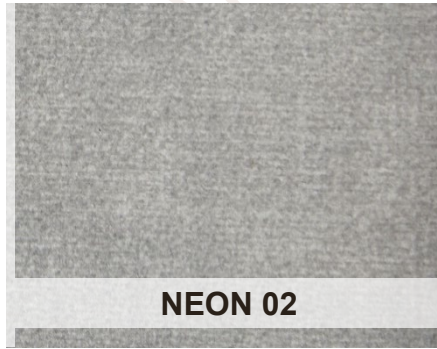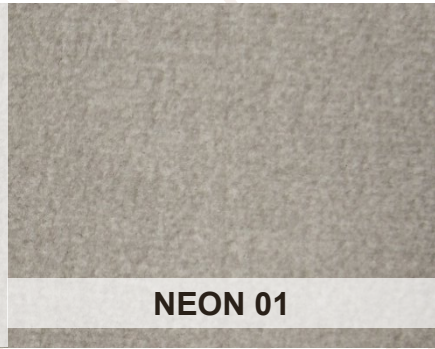

Click here to chat with us





Click here to chat with us










SPECIFICATION REQUIRED



Click here to chat with us



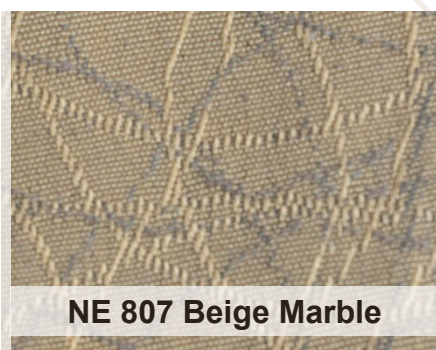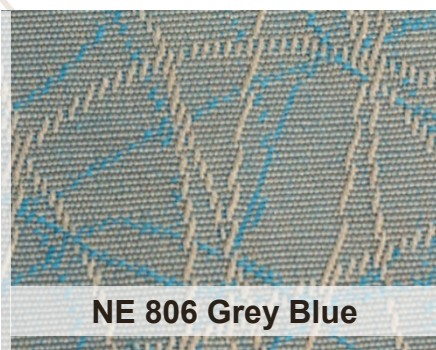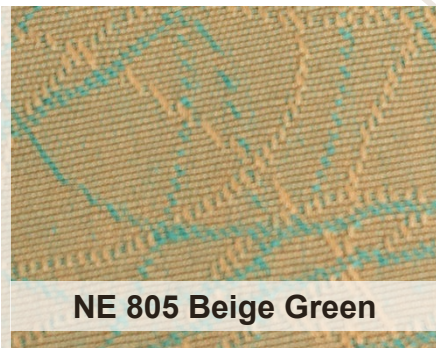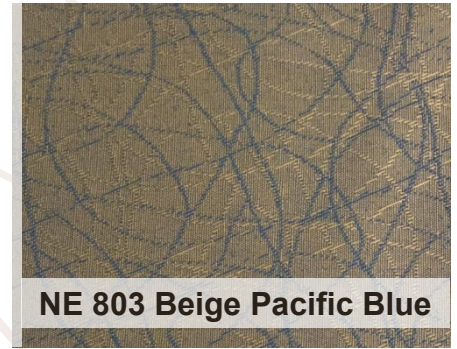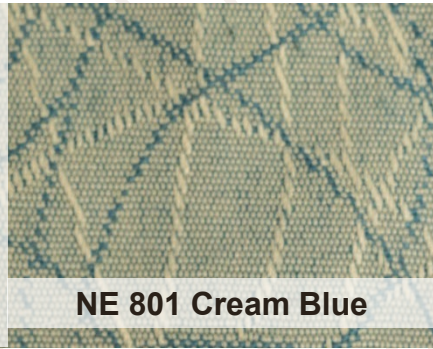

Click here to chat with us






NE 811 Natural Stone




NE 814 Gray Gargoyle




NE 817 Cement Yellow

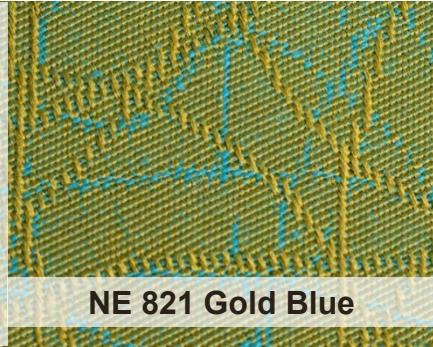

NE 821 Gold Blue

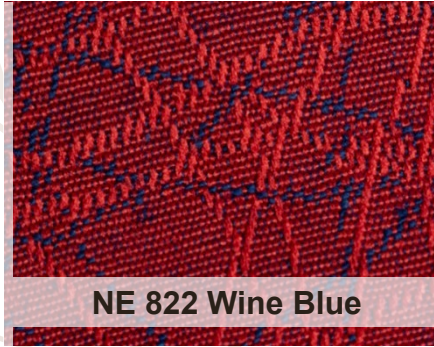

NE 822 Wine Blue

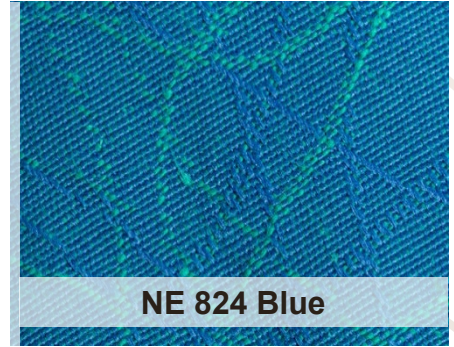

NE 824 Blue



NEPTUNE

*Fabric for modern
workstation with
unique shades.*

Response
Fabric For The World's Best Offices



Click here to chat with us



NEPTUNE




Composition	Polyester/Recycled Cotton
Weight	350 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 50,000 cycles (800g/12kpa) Martindale
Flammability	BS EN 1021-1 : 1994 (Cigarette) BS 7176: 1995 Low Hazard Flammability performance is dependent on the combination of material used.
Fastness to Light	5+[BS 1006 (1990)]
Fastness to Rubbing	Wet: 5 & Dry: 4.5
Maintenance	Professional cleaning is recommended
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Hydroguard	This special treatment is applied to provide water and stain repellency available on request.



Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com

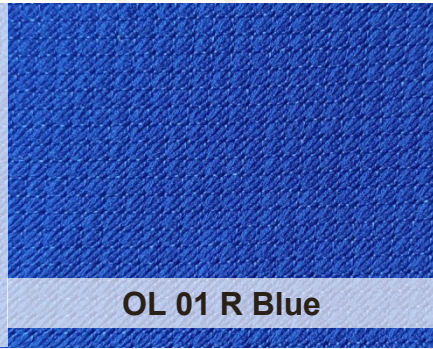

OL 01 R Blue



OL 02 Red



OL 03 Maroon



OL 04 N Blue



OL 05 Gray



OL 06 Black



Click here to chat with us



OLIVER



Composition	100% polyester
Weight	159 grams per liner meter
Width	152 cms/60* +/-2%
Abrasion	60,000 Cycles (Martindale : ISO12947-2L:1988)
Flammability	BS EN 1021- 1994(Cigarette) BS 7176: 1995 Low Hazard Flammability performance is dependent on the combination of material used
Fastness to Light	5 [BS 105-B02,2000]
Fastness to rubbing	Wet: 4 & Dry: 4
Maintenance	Professional cleaning is recommended.
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Fire Retardant	BS EN 1020-1: 1994 (Cigarette test) Pass. BS EN 1020-2: 1994 (Match Flame test) Pass

Response TM
Fabrics
Fabrics For The World's Best Offices










Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.



www.responsefabrics.com

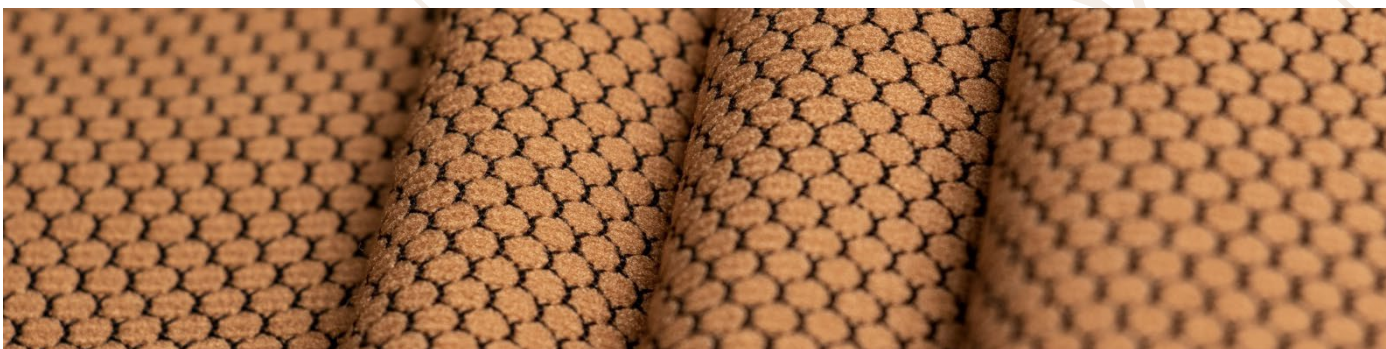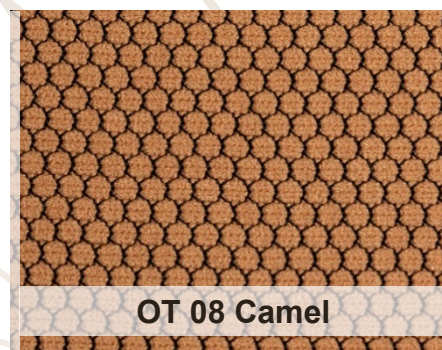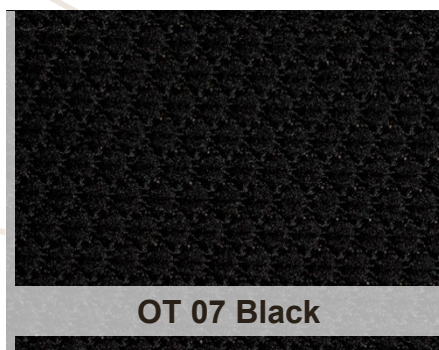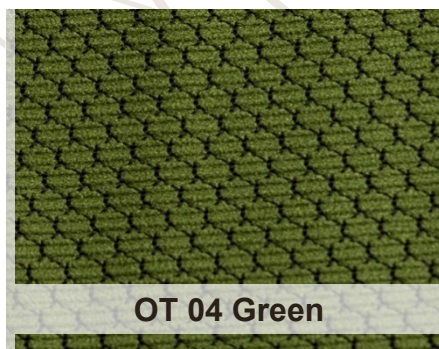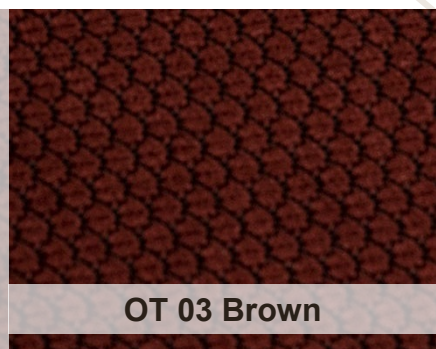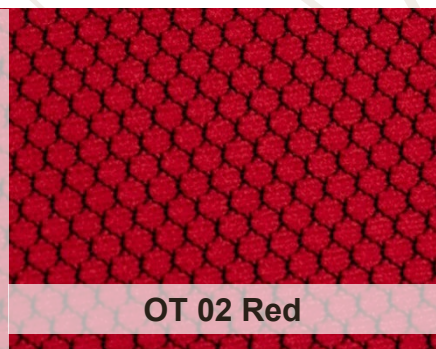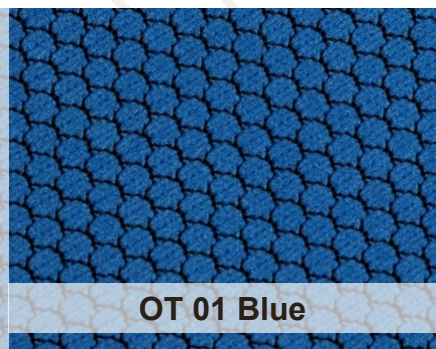

Click here to chat with us



ORBIT



Composition	100% Polyester
Weight	350 grams per liner meter \pm 5%
Width	150 cms/60" \pm 2%
Abrasion	In excess of 50,000 Cycles (800g/12kpa) Martindale
Fastness to Light	5 (ISO: 105-B02, 2000)
Fastness to Rubbing	Wet : 4-5 & Dry : 4-5
Maintenance	Professional cleaning is recommended
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Option : 1	Fire retardant – Fabric will meet BS EN 1021 (Match) and IS: 1561-2002 when treated with FR extreme process.
Option : 2	Hydroguard – This special treatment is applied to provide water and strain repellency.

ResponseTM
Fabrics For The World's Best Offices




Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.



www.responsefabrics.com

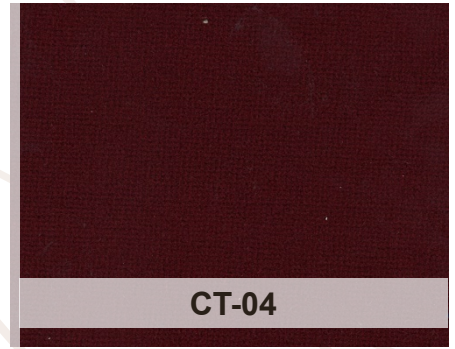

Click here to chat with us



OXYCOMFORT




Content	100% Polyester
Weight	500 grams per liner meter \pm 5%
Width	152 cms/60" \pm 2%
Colour Fastness	Wet: 4 & Dry: 5
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Flammability Test	BS EN 1021: 1 (Cigarette)
Suitable For	Acoustic panelling & seating





Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

 www.responsefabrics.com

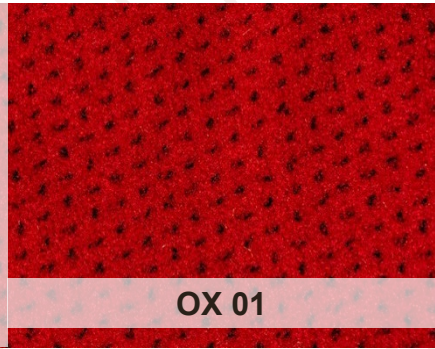

OX 01

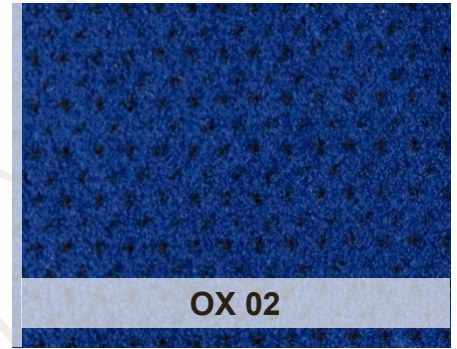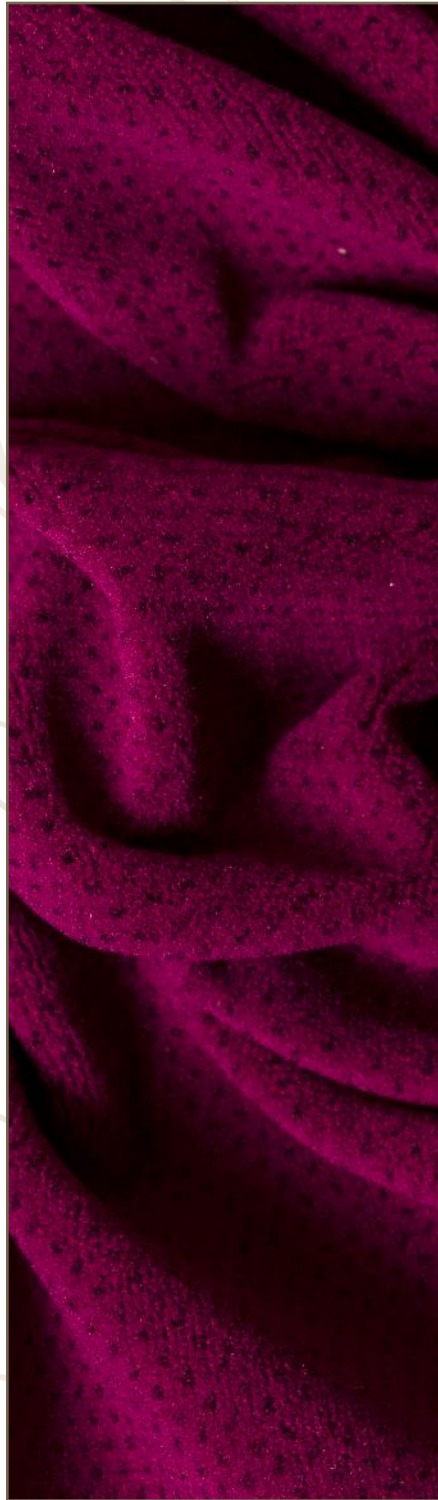

OX 02



OX 03



Click here to chat with us



OXYGEN




Composition	100% Polyester
Weight	500 grams per meter
Width	58"
Colour fastness	Wet: 4 & Dry: 4
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Flammability test	BS E 1021:1
Suitable	for acoustic paneling and seating




Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.


www.responsefabrics.com

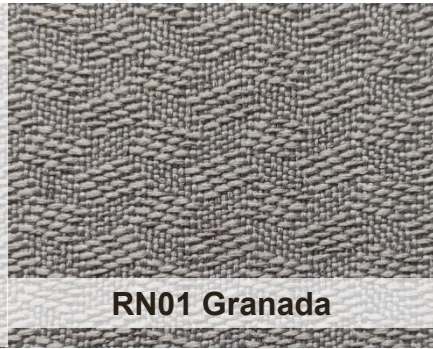

RN01 Granada

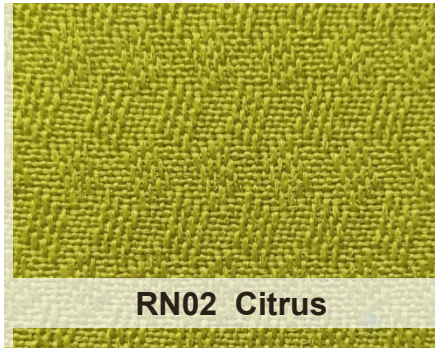

RN02 Citrus

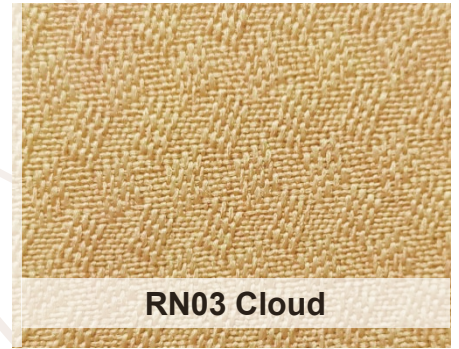

RN03 Cloud




RN04 Rose



RN05 Golden Aura



RN06 Old Brick

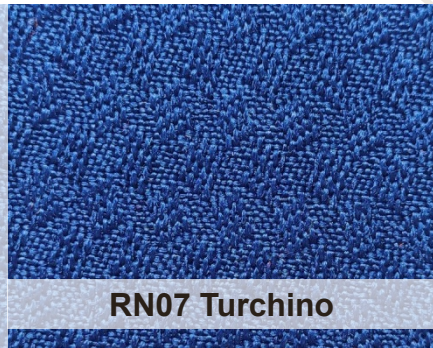

RN07 Turchino




RN08 Fusia



RN09 Apple Green



RN10 Blush

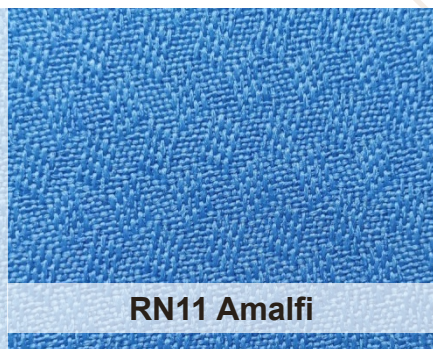

RN11 Amalfi



RN12 Carbon



Click here to chat with us



RAINBOW



Composition	100% Polyester
Weight	330 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 60,000 Cycles Martindale Abrasion tester at 12KPA Pressure.
Flammability	BS EN 1021-1 : 1994 (Cigarette) BS 7176 : 1995 Low Hazard Flammability performance is dependent on the combination of material used.
Fastness to Light	5 (ISO: 105-B02, 2000)
Fastness to Rubbing	Wet: 4-5 & Dry: 4-5

ResponseTM
Fabrics For The World's Best Offices


Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.



Click here to
chat with us



www.responsefabrics.com

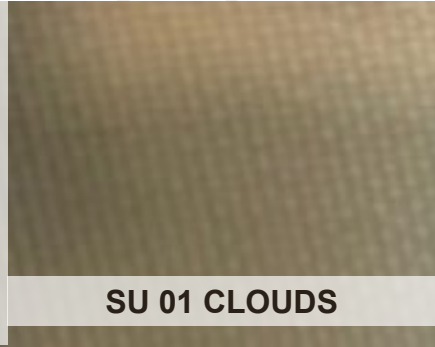

SU 01 CLOUDS



SU 02 OCEAN BLUE



SU 03 ELECTRIC




SU 04 STONE



SU 05 GUNGREY



SU 06 CAMEL

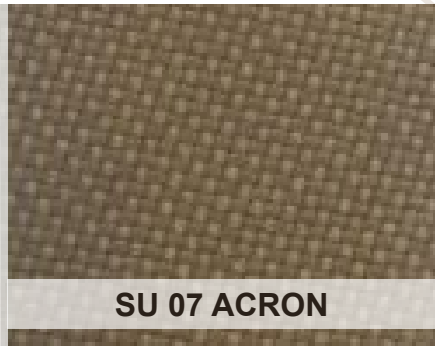

SU 07 ACRON



SU 08 WATERFALL



SU 09 INDIGO



SU 10 GRANADA



SU 11 PLANET



SU 12 BROWN



SU 13 ALOEVERA



SU 14 WINE




SU-15 CANYON SUN



Click here to chat with us




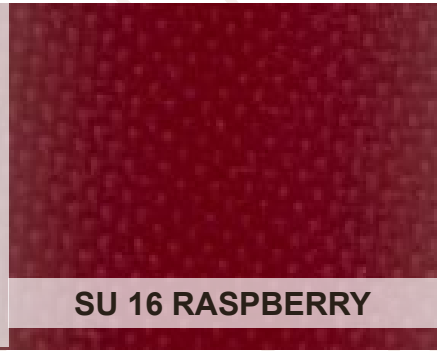

SU 16 RASPBERRY



SU 17 MARIGOLD

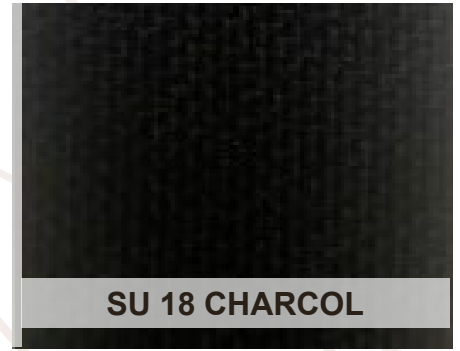

SU 18 CHARCOL



SU 19 OLIVE



SU 20 FLAME



SU 21 CINNAMON



SU 22 VIOLET



SU 23 DAGO ORANGE



Click here to chat with us





SPECIFICATION REQUIRED



Click here to chat with us





VP 01



VP 03



VP 02



VP 04



Click here to chat with us



VELVET










Content	100% Polyester
Weight	370 grams per liner meter \pm 5%
Width	152 cms/60" \pm 2%
Abrasion Resistance	50,000 Cycles
Colour Fastness	Wet: 4 & Dry: 5
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Flammability Test	Optional
Suitable For	Acoustic panelling & seating



Click here to chat with us




Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com

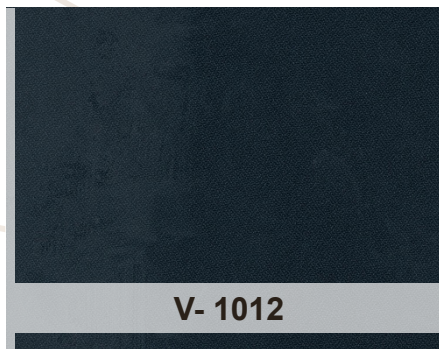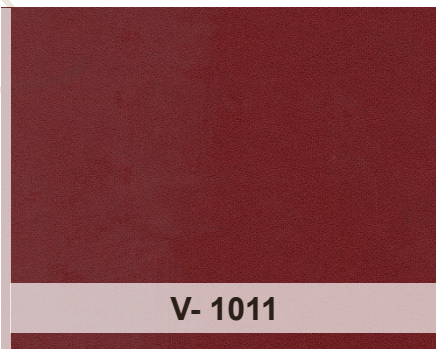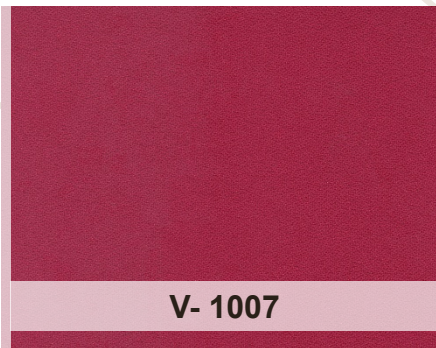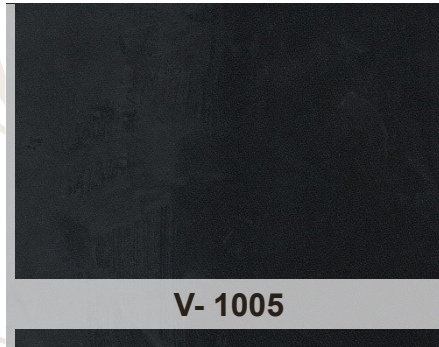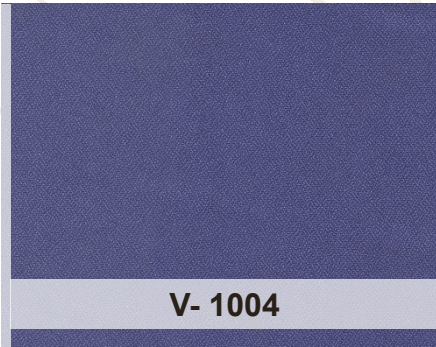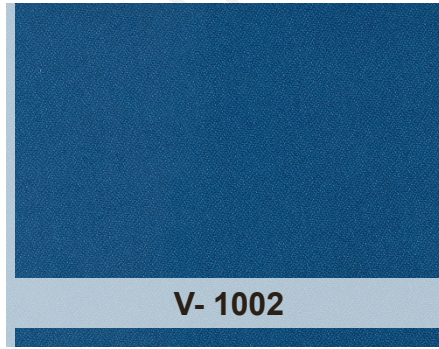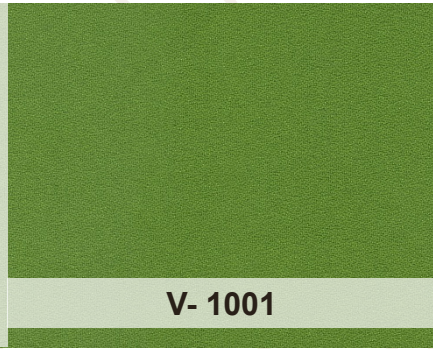


Click here to chat with us



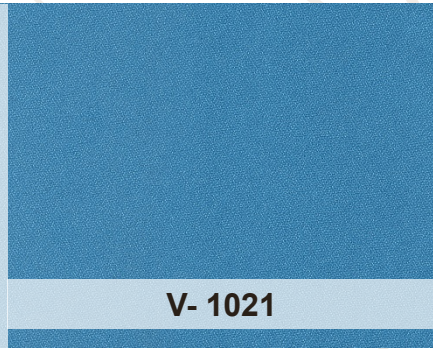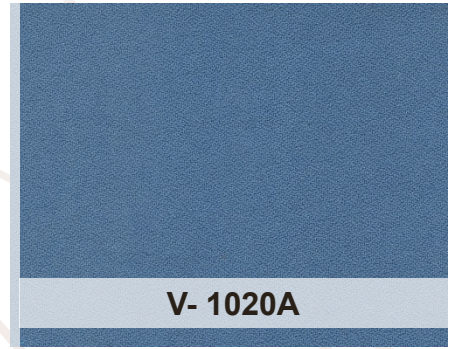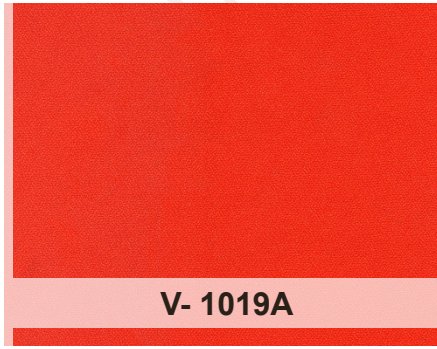

Click here to chat with us



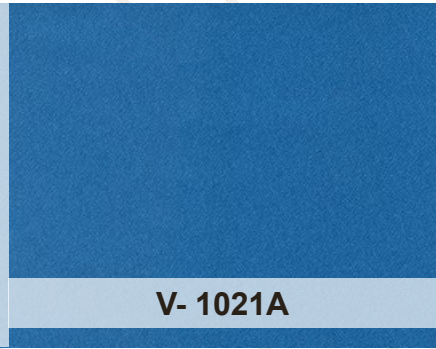

V- 1021A



V-1022




V- 1023



V- 1024




V- 1025

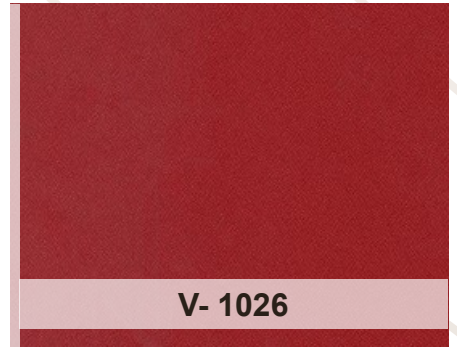


V- 1026



V- 1027

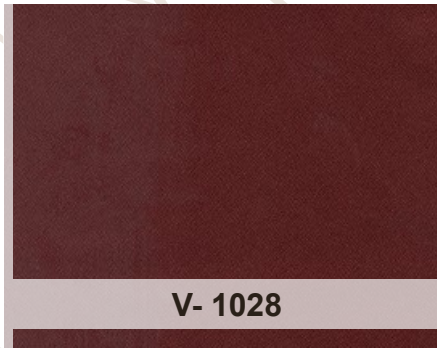

V- 1028

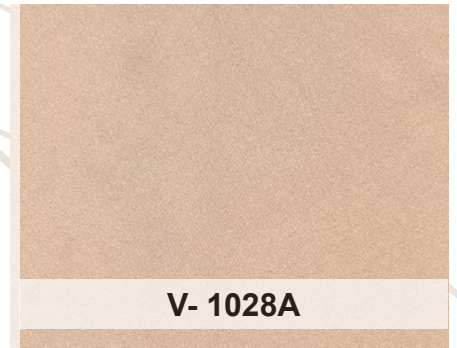

V- 1028A



V- 1029



V- 1030



V- 1031



V- 1032



V- 1033



V- 1034



Click here to chat with us



VIBRANT



Composition	100% Polyester
Weight	350 grams per liner meter \pm 5%
Width	140 cms/55" \pm 2%
Abrasion	In excess of 90,000 cycles Martindale Abrasion tester at 12KPA Pressuer.
Fastness to Light	5+[BS 1006 (1990)]
Fastness to Rubbing	Wet : 5 & Dry : 4.5
Colour Matching	Batch to batch variations in shade may occur within commercial tolerances.
Option : 1	Fire retardant – Fabric will meet BS EN 1021(Match) and IS: 1561-2002 when treated with FR extreme process.
Option : 2	Hydroguard – This special treatment is applied to provide water and strain repellency.



Click here to chat with us

Head Office: A2, Sector 21,
Meerut Road Industrial Area, Ghaziabad,
Uttar Pradesh – 201003, India.

www.responsefabrics.com